


Code: 780AG-614  
780AG-625

technical specifications

# BLACK / TECHNO adjustable

Thermostatic Shower Column

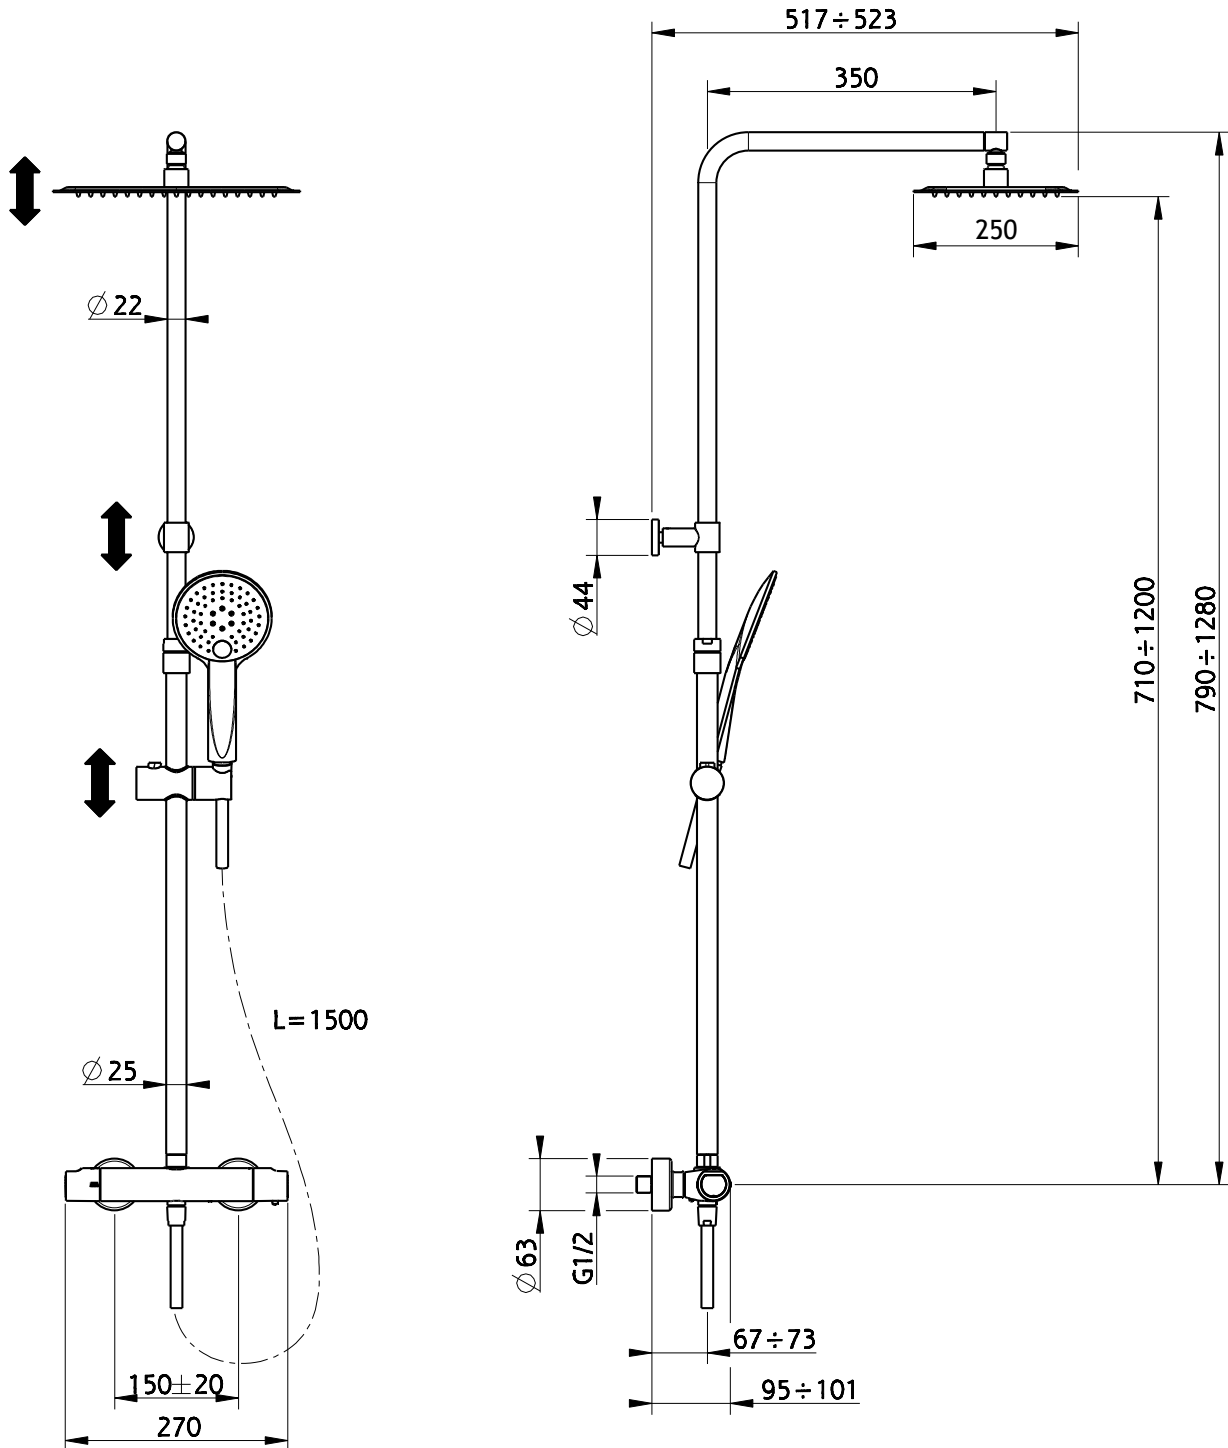

# CIFIAL<sup>®</sup>

[www.cifial.co.uk](http://www.cifial.co.uk)  
[sales@cifial.co.uk](mailto:sales@cifial.co.uk)


dimensions mm

**OPERATING CONDITIONS**

- Minimum dynamic pressure.....1 bar
- Recommended working pressure (static).....3 bar  
(ATTENTION: when pressure exceeds 5 bar, the installation of a pressure reducer is recommended)
- Maximum working pressure (static).....5 bar
- Maximum test pressure (static).....16 bar
- Maximum hot water temperature.....80 °C
- Recommended hot water temperature.....65 °C (for safety and energy saving)






Non incluso / Not included / Non inclus / Nicht Dabei / No incluido / Nitinbegrepen

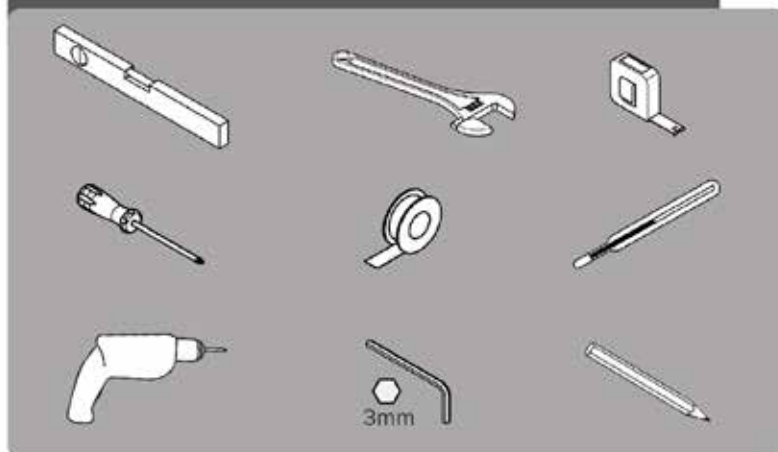
**CIFIAL®**



www.cifial.co.uk  
sales@cifial.co.uk

Incluso / Included / Inclus / Dabei / incluido / Inbegrepen

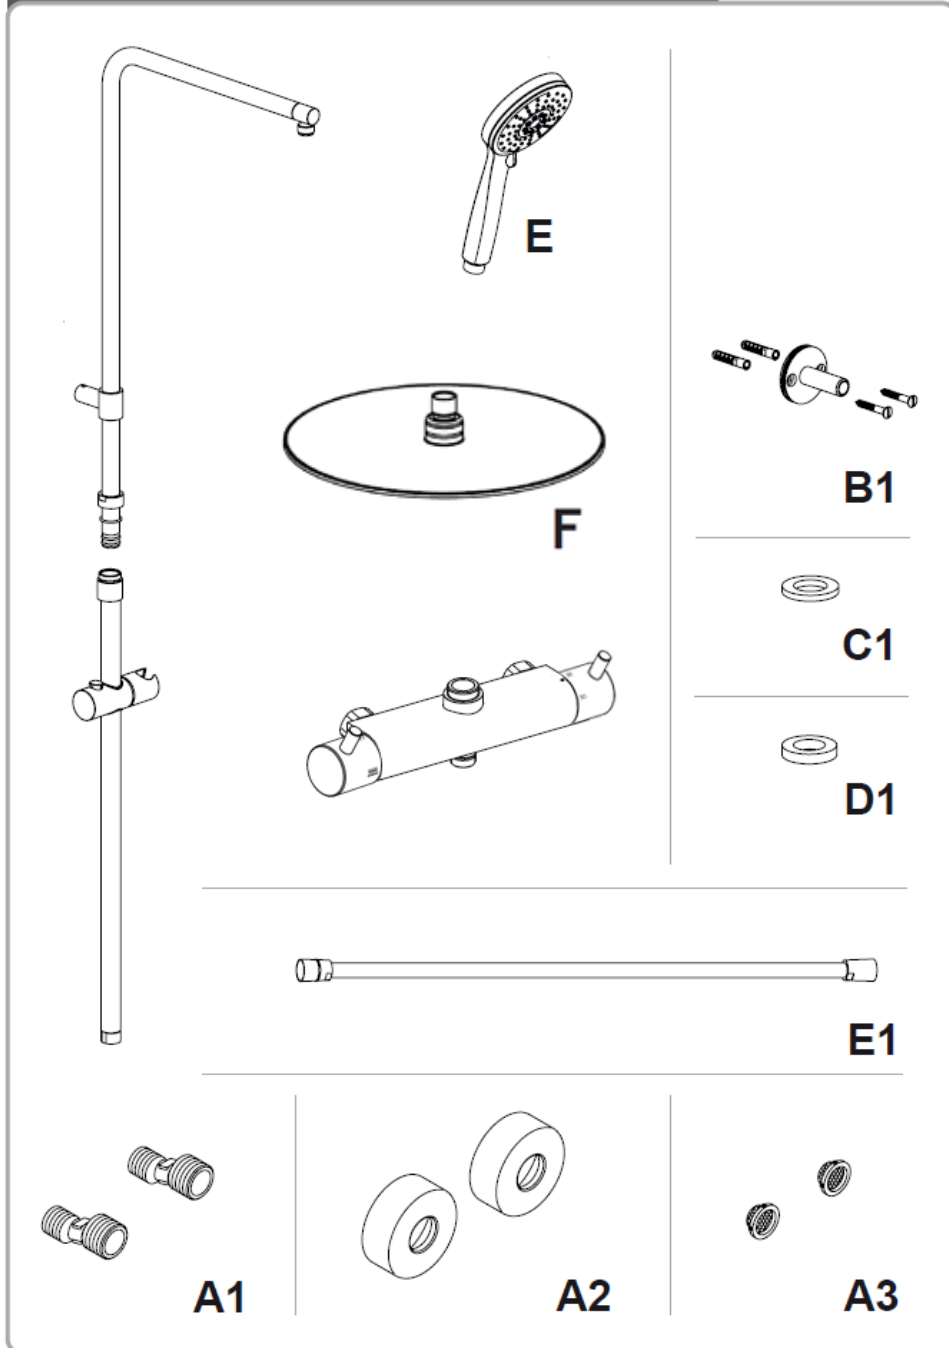

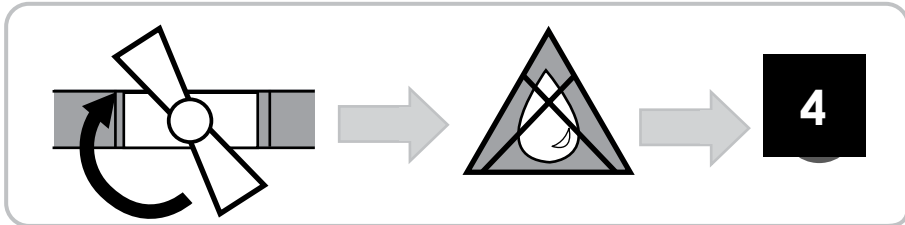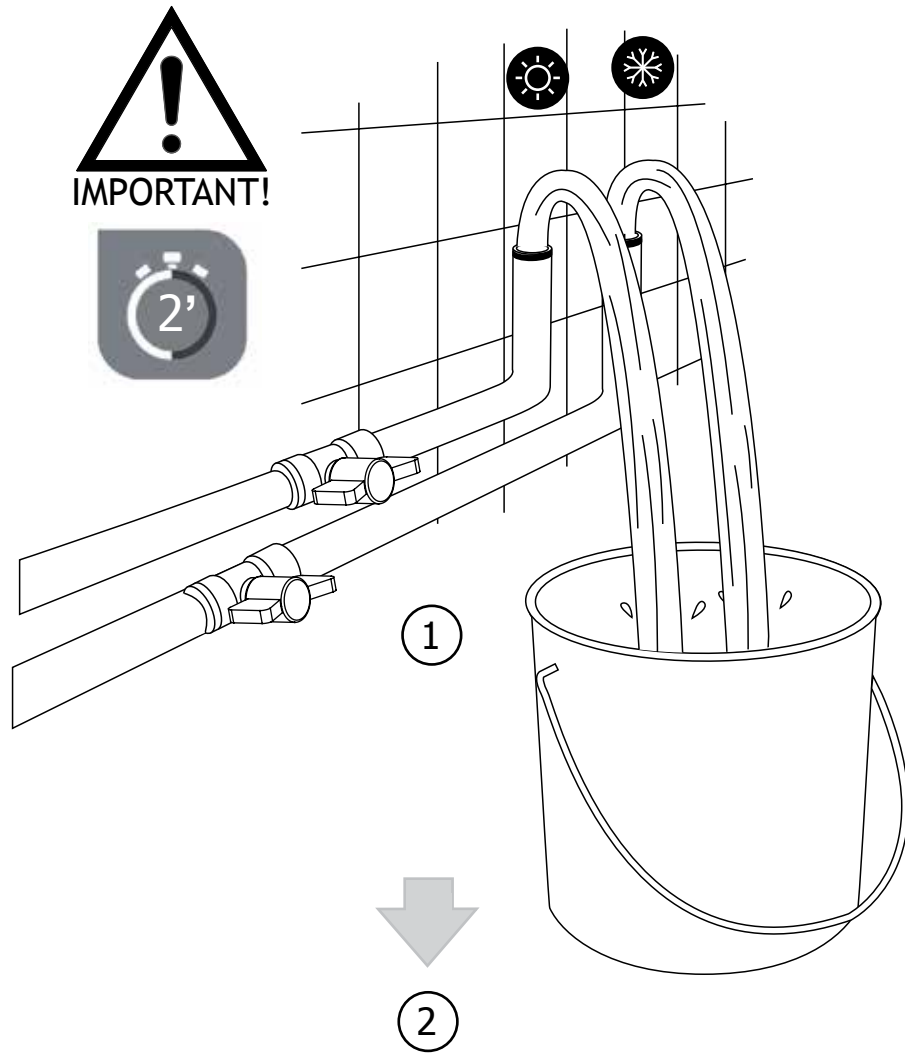


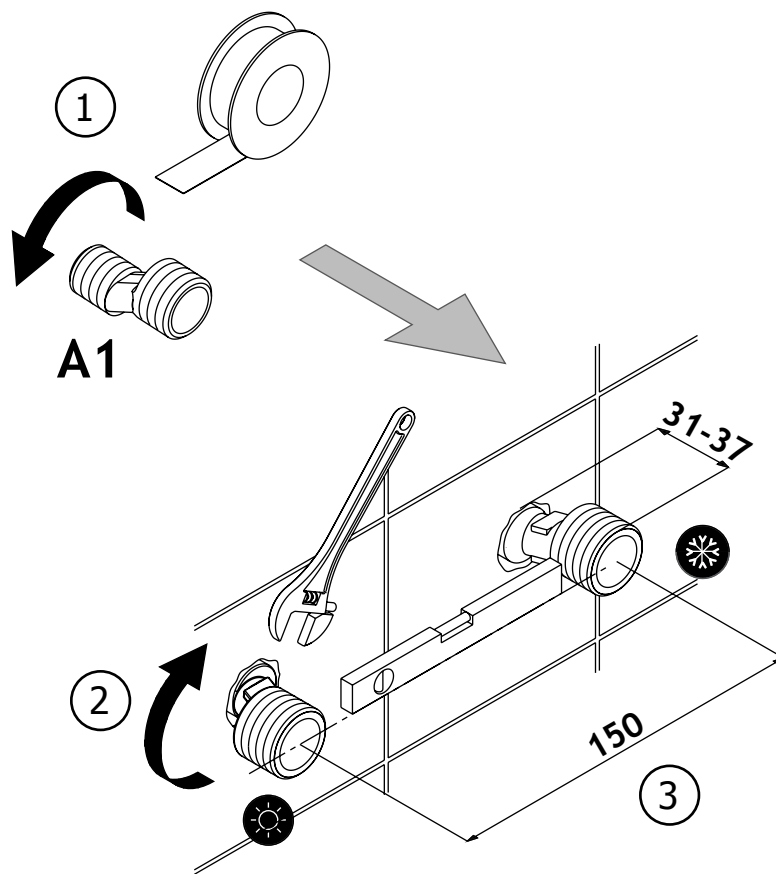

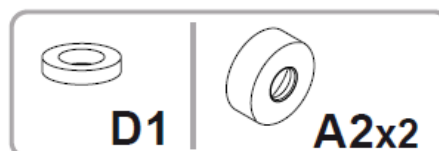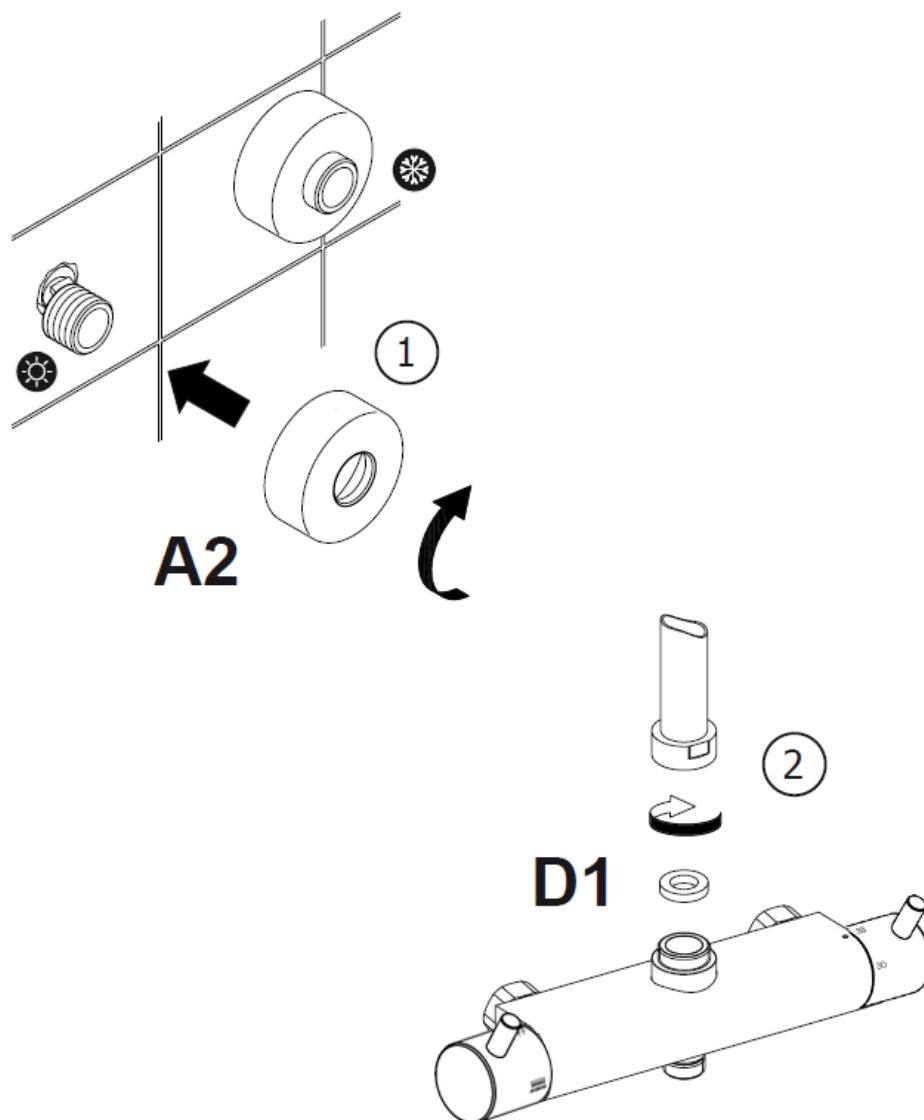


# CIFIAL®

www.cifial.co.uk  
sales@cifial.co.uk

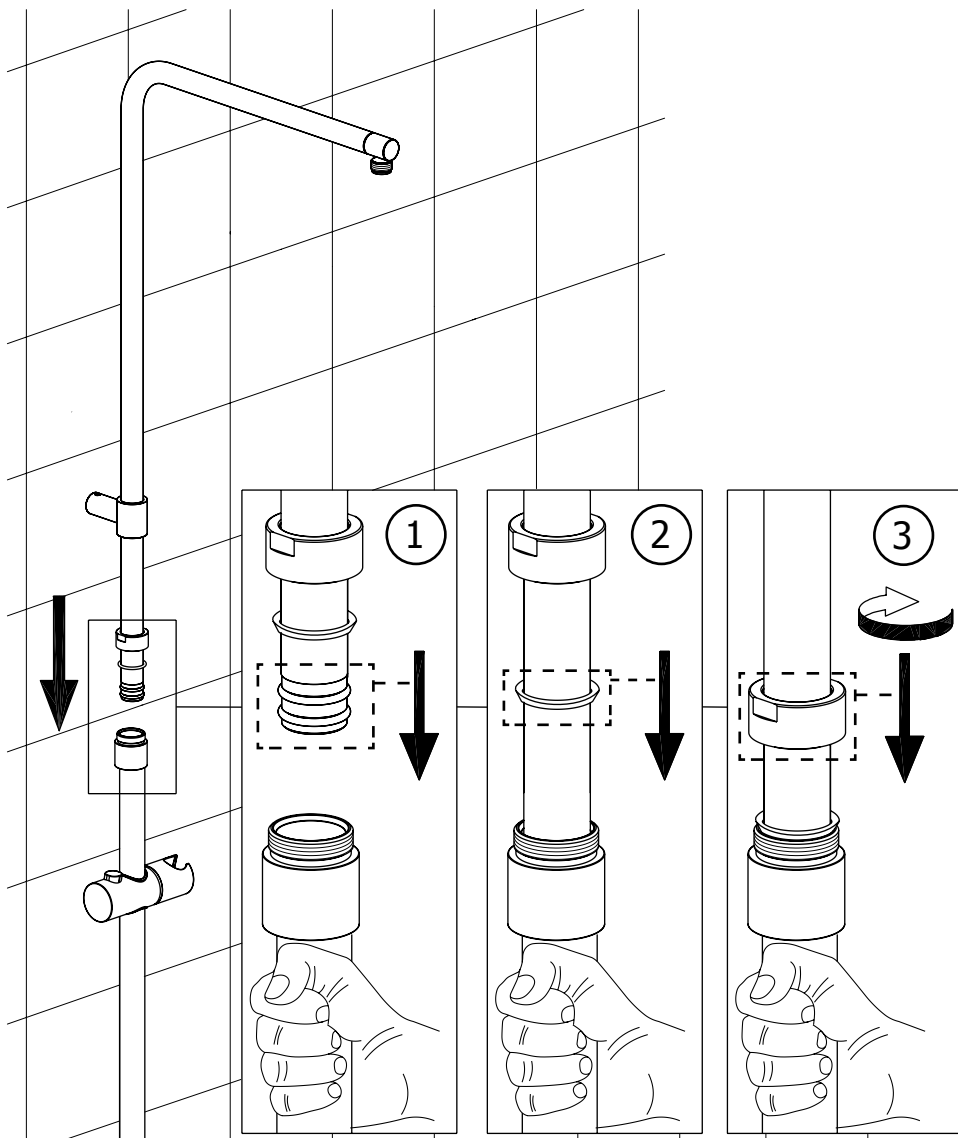

**CIFIAL®**



[www.cifial.co.uk](http://www.cifial.co.uk)  
[sales@cifial.co.uk](mailto:sales@cifial.co.uk)

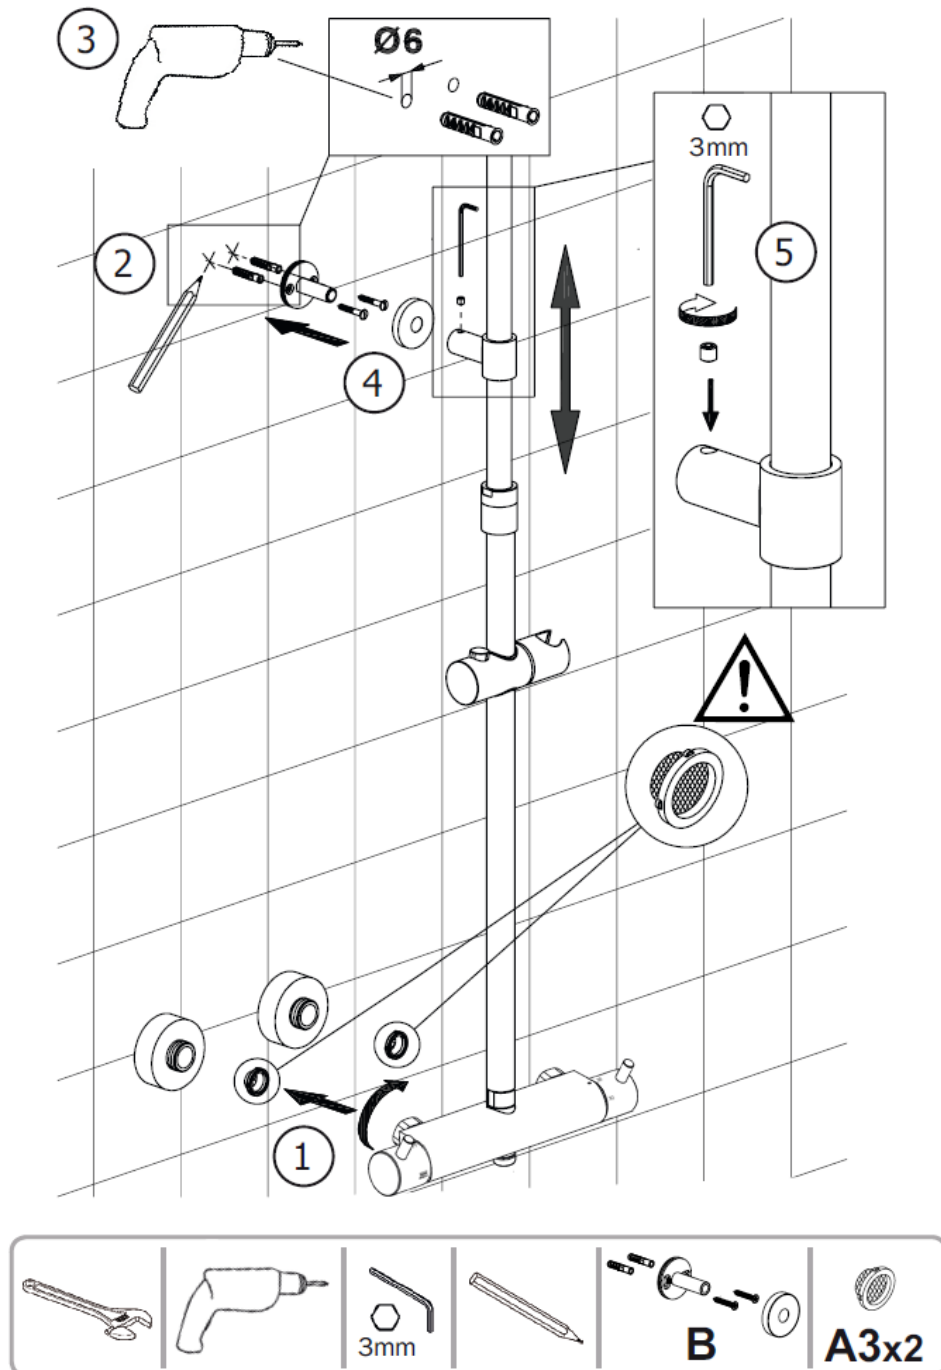

# CIFIAL<sup>®</sup>

www.cifial.co.uk  
sales@cifial.co.uk



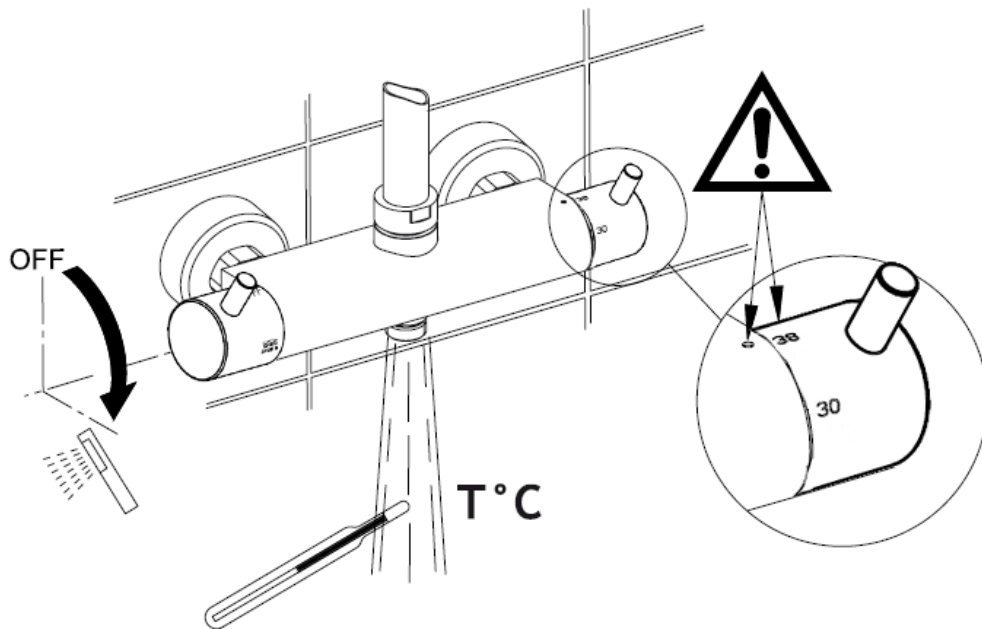


$T^{\circ}\text{C} \cong 38^{\circ}\text{C}$  → OK → **11**

$T^{\circ}\text{C} \neq 38^{\circ}\text{C}$  → **9** **10**




**CIFIAL®**

www.cifial.co.uk  
sales@cifial.co.uk

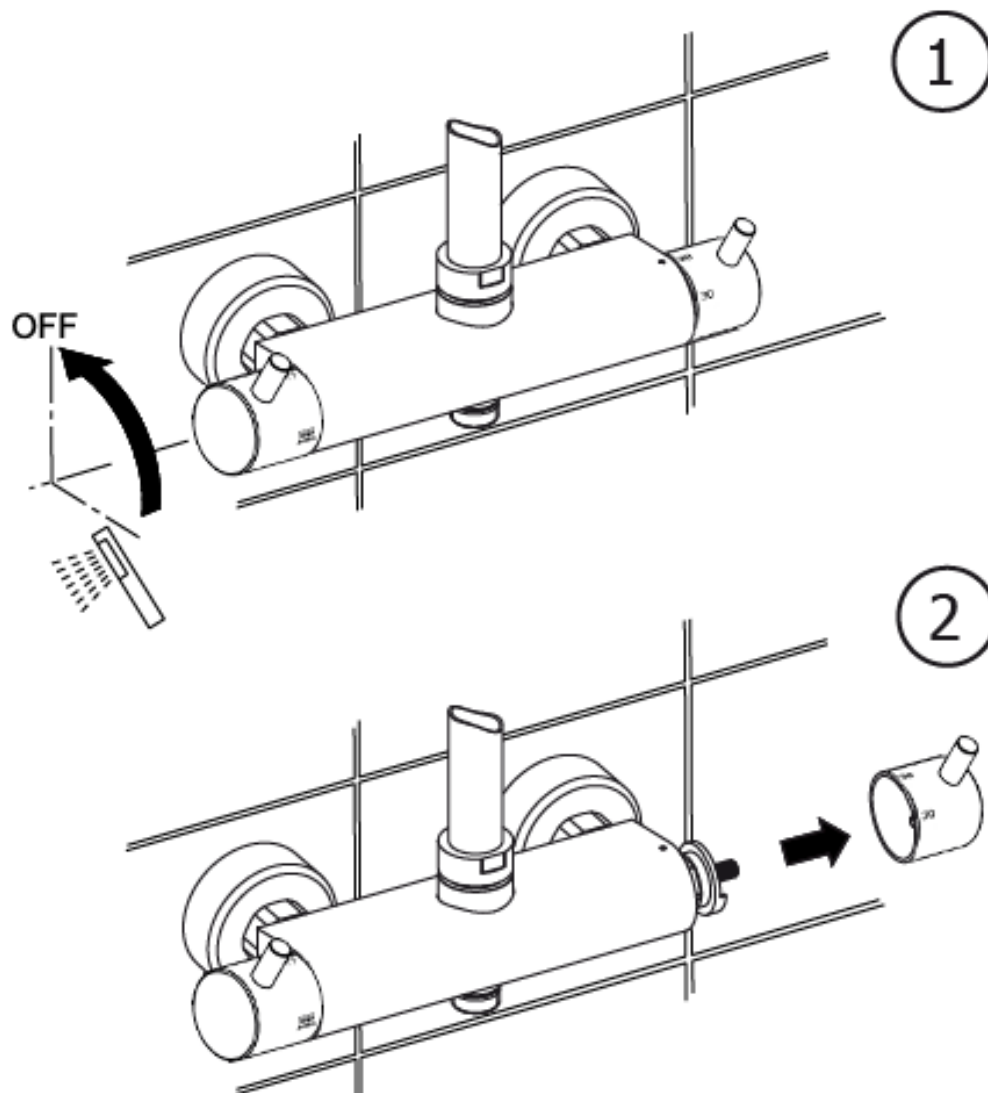


# CIFIAL<sup>®</sup>

[www.cifial.co.uk](http://www.cifial.co.uk)  
[sales@cifial.co.uk](mailto:sales@cifial.co.uk)

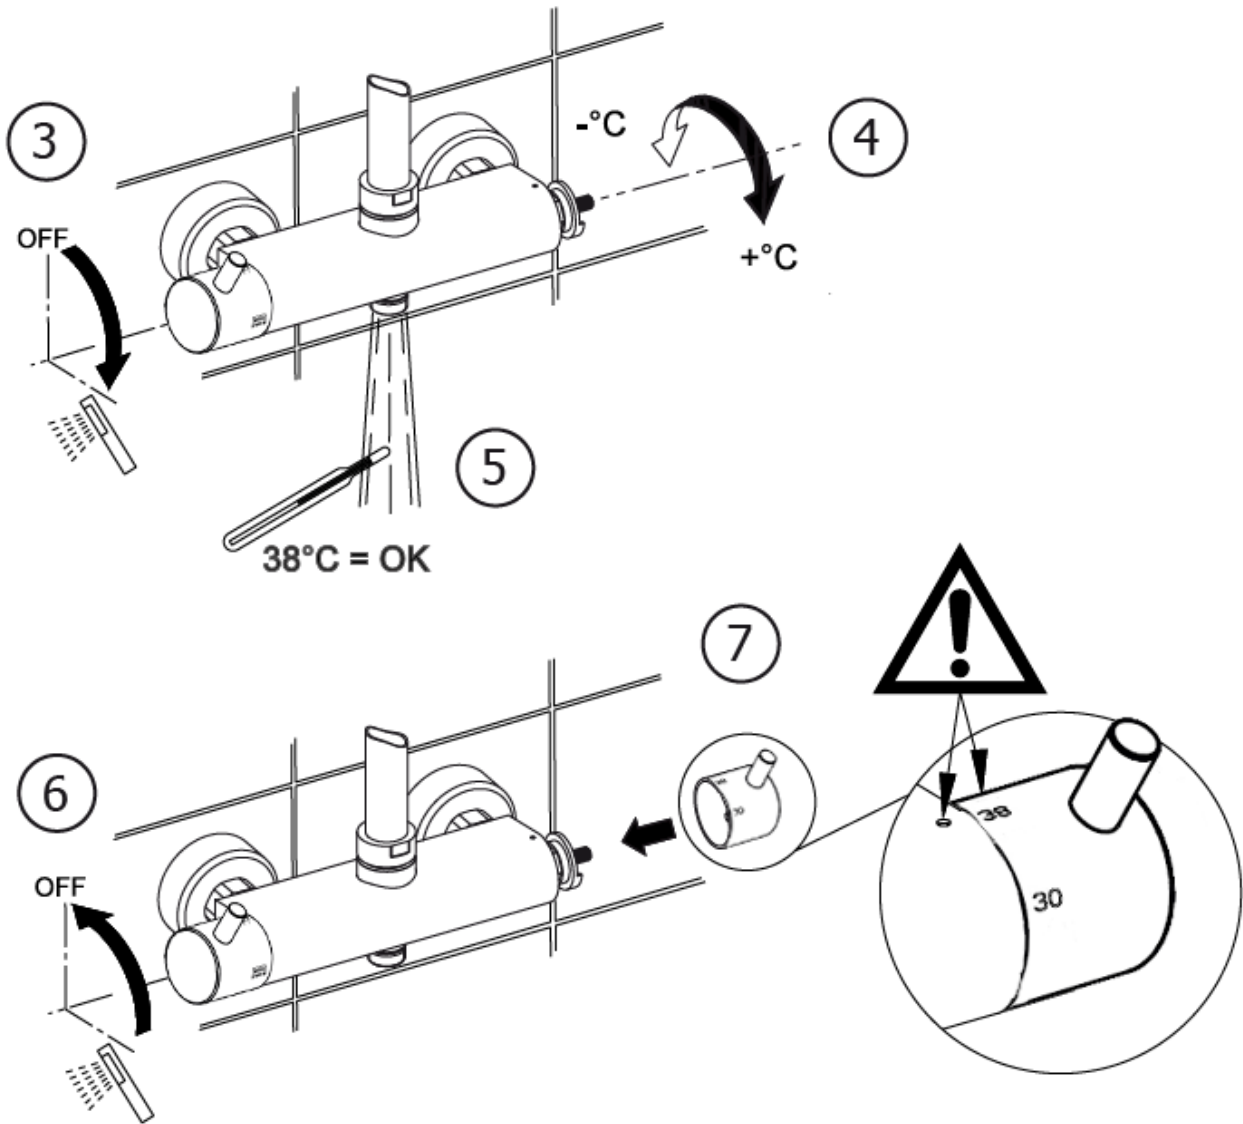



**CIFIAL®**



www.cifial.co.uk  
sales@cifial.co.uk

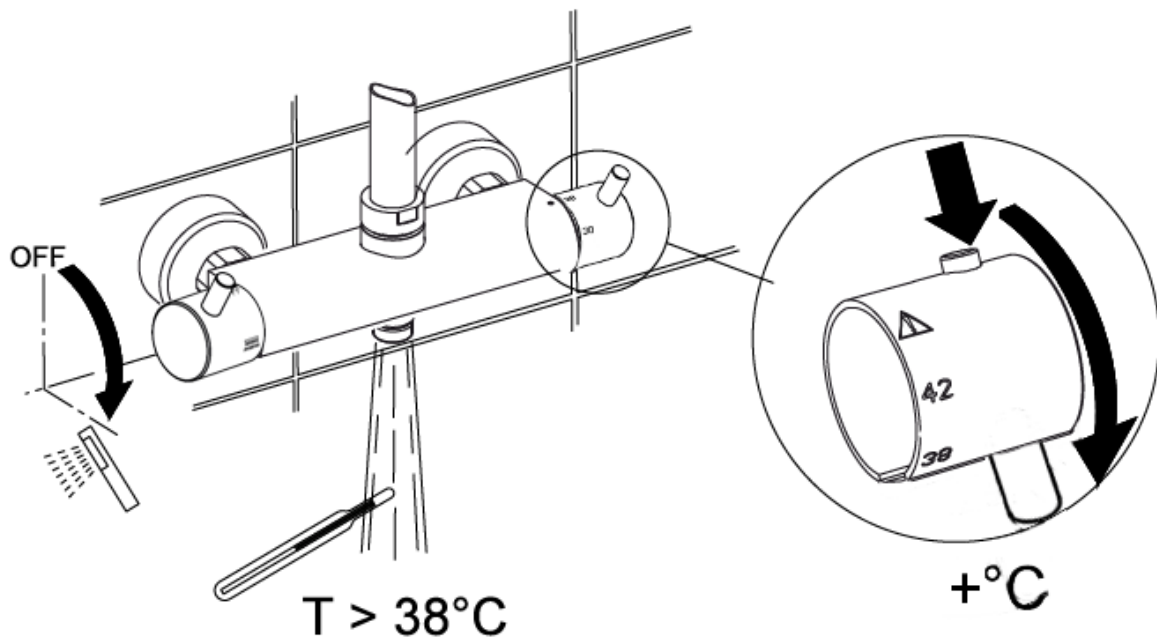

# CIFIAL®

[www.cifial.co.uk](http://www.cifial.co.uk)  
[sales@cifial.co.uk](mailto:sales@cifial.co.uk)




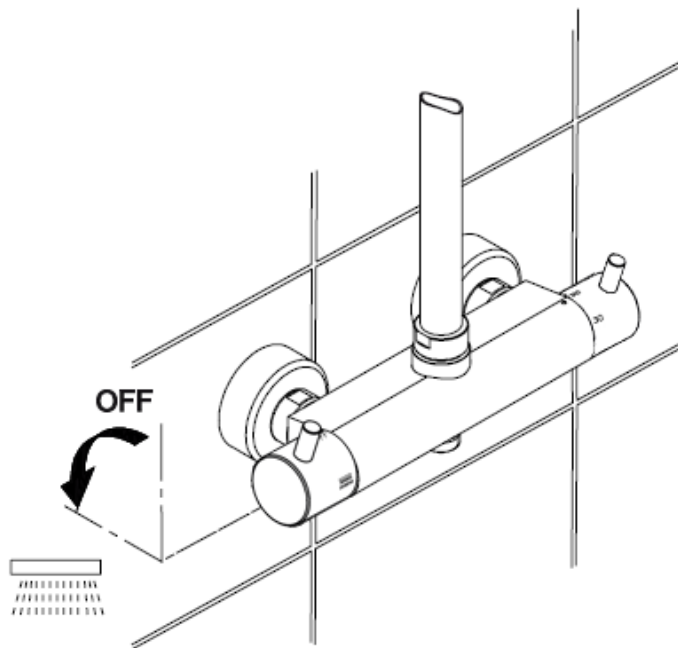
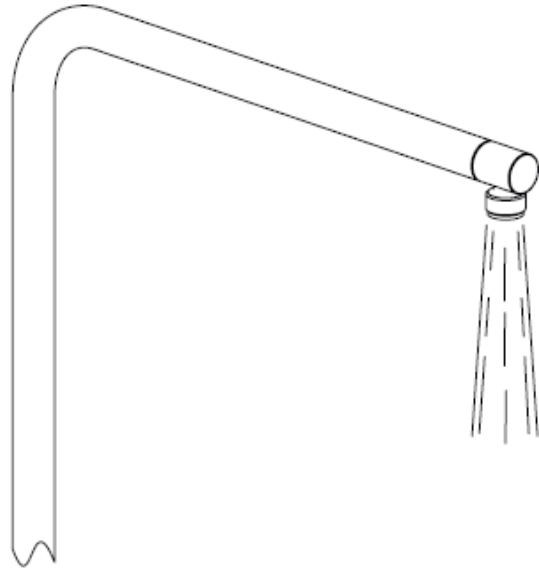


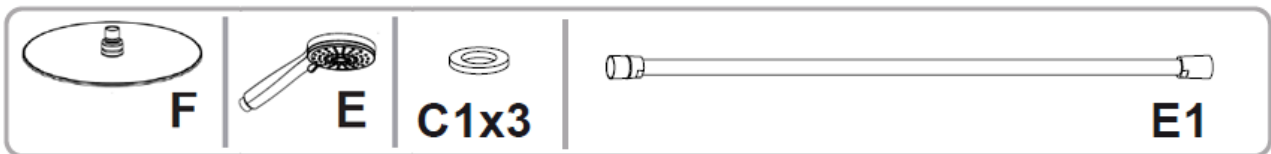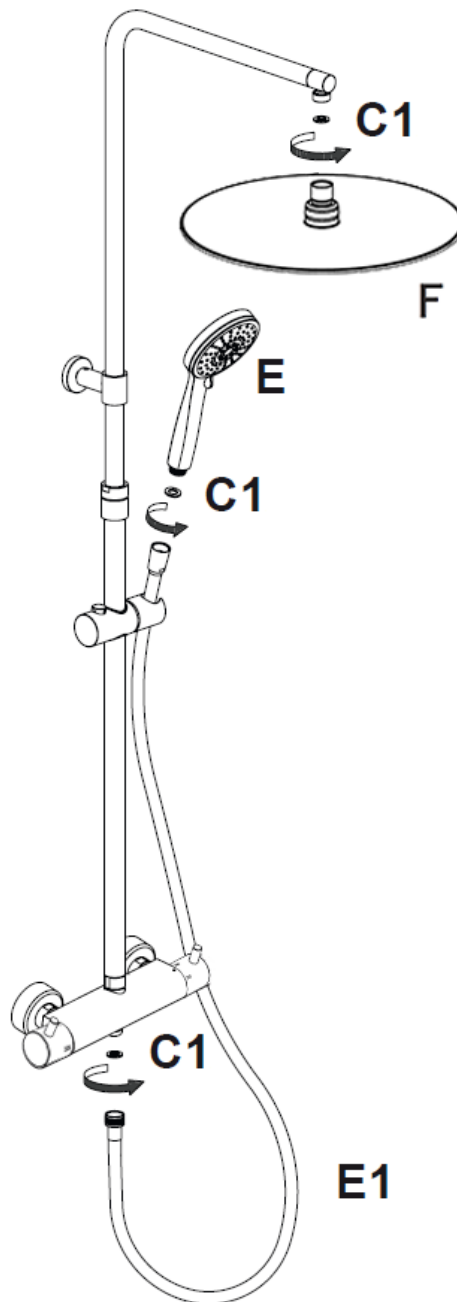

# CIFIAL<sup>®</sup>





[www.cifial.co.uk](http://www.cifial.co.uk)  
[sales@cifial.co.uk](mailto:sales@cifial.co.uk)

Not included / Non inclus / δεν συμπεριλαμβάνονται / Não incluído / Non incluso / brak w zestawie  
no incluido / не входит до комплекты / neinclus / dahil değildir / Не входит в комплект

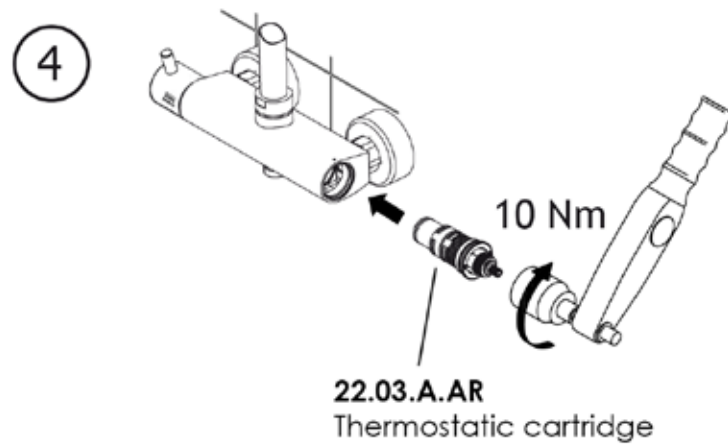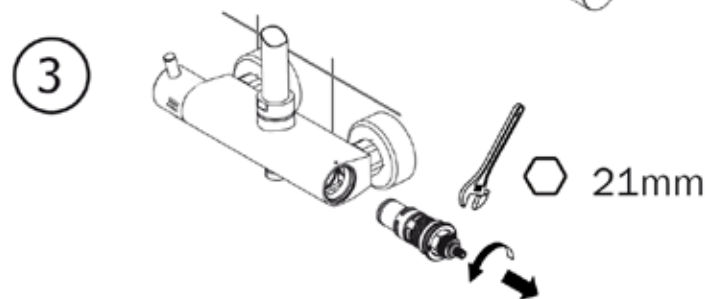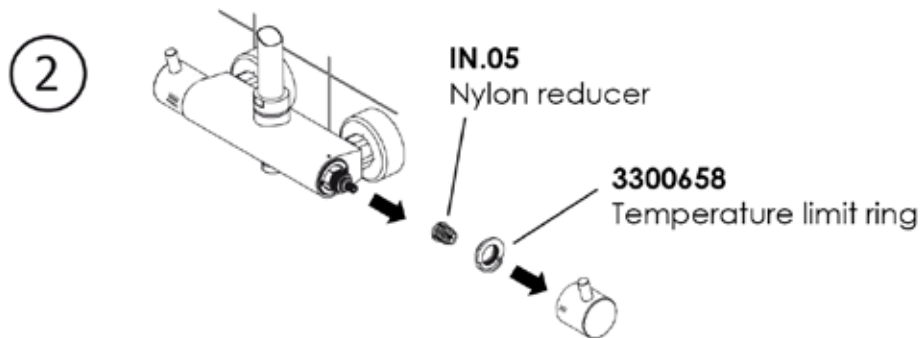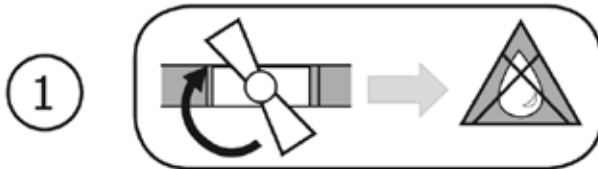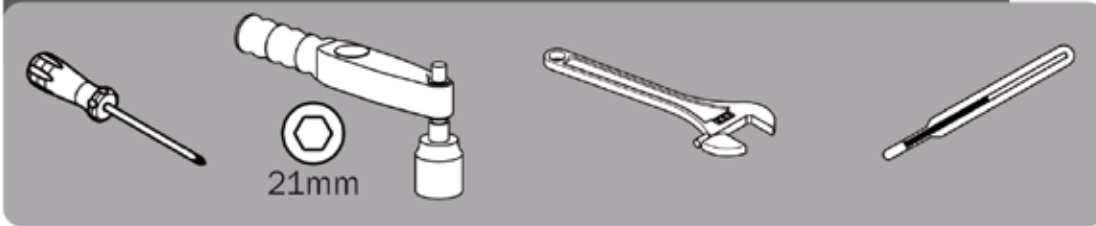

**CIFIAL®**

www.cifial.co.uk  
sales@cifial.co.uk

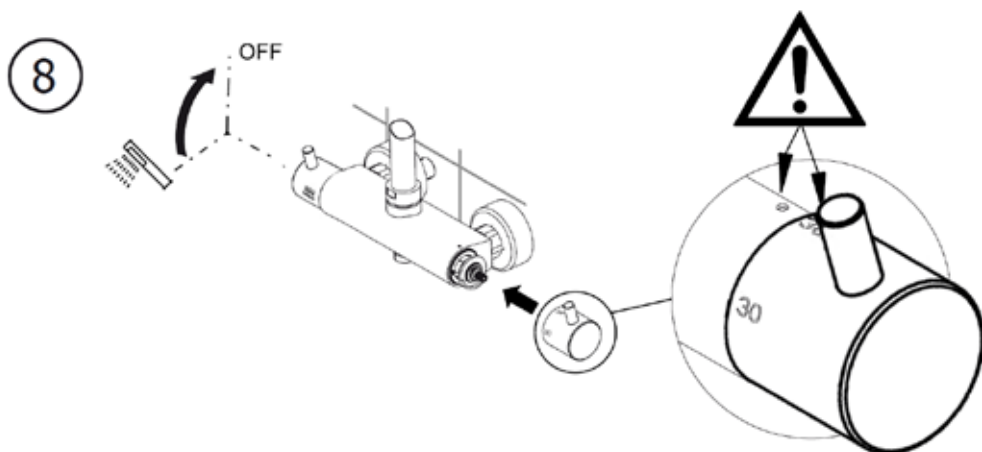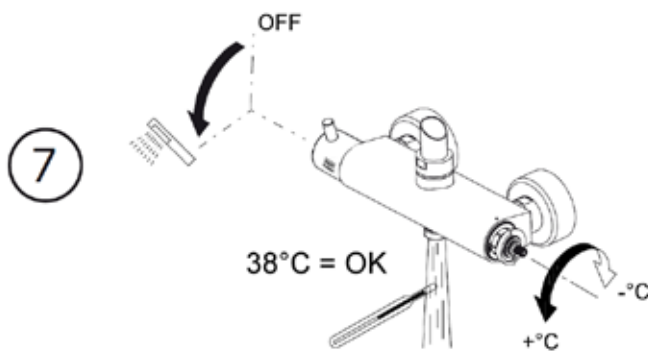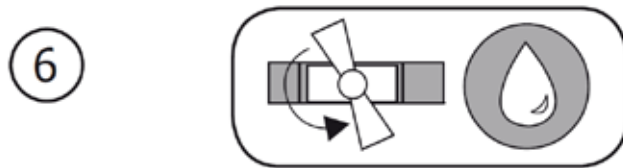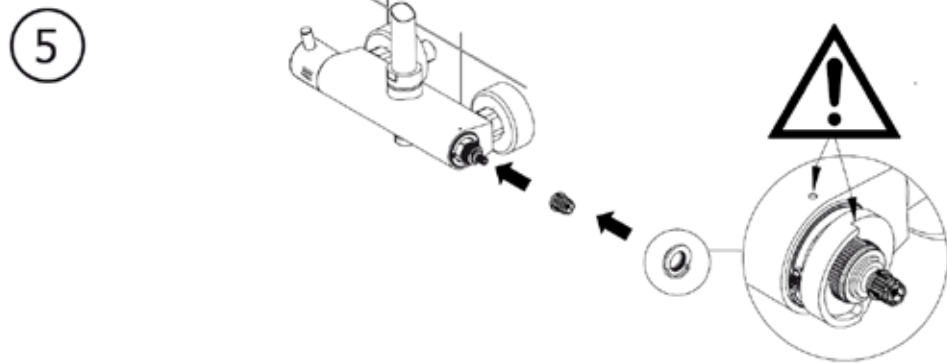

# CIFIAL®

www.cifial.co.uk  
sales@cifial.co.uk






**Pressione dinamica minima di utilizzo consigliata 1,5 bar**  
**Pulire regolarmente gli ugelli**

**Minimum Dynamic Pressure Suggested 1,5 bar**  
**clean the nozzles periodically**

**Pression dynamique minimum recommandée 1,5 bar**  
**Nettoyer régulièrement les picots**


**Empfehlender min. dynamischer Nutzungsdruck 1,5 Bar**  
**Düsen regelmäßig reinigen**

**Presión dinámica mínima de trabajo recomendada 1,5 bar**  
**Limpiar regularmente las salidas de agua anti-cal**

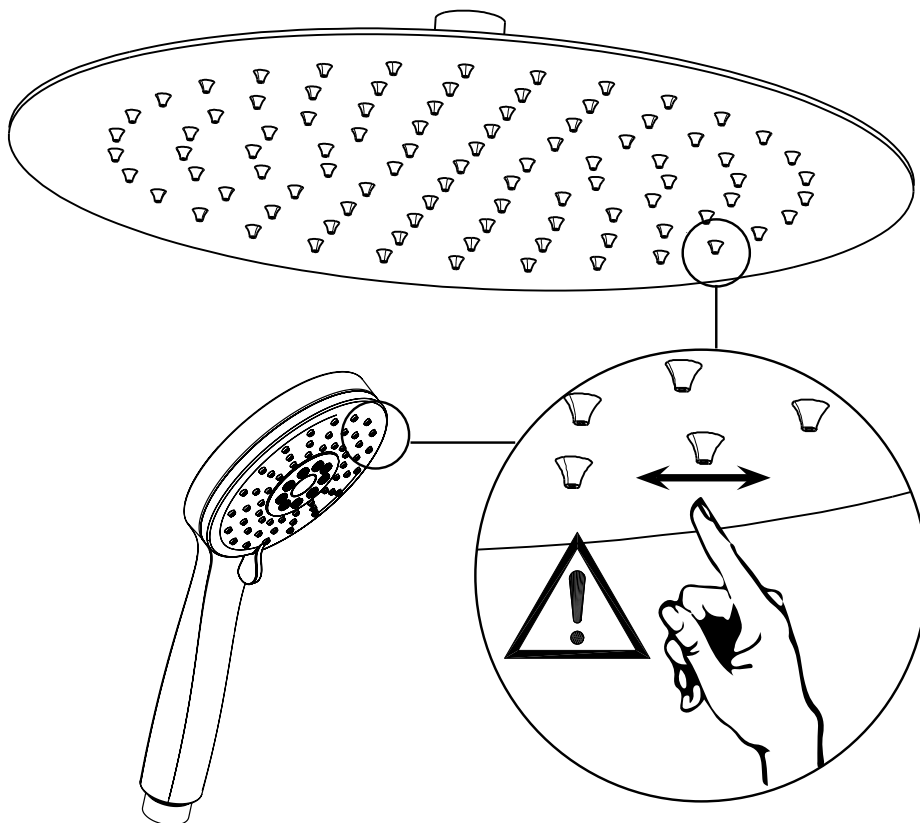

**CIFIAL®**

[www.cifial.co.uk](http://www.cifial.co.uk)  
[sales@cifial.co.uk](mailto:sales@cifial.co.uk)

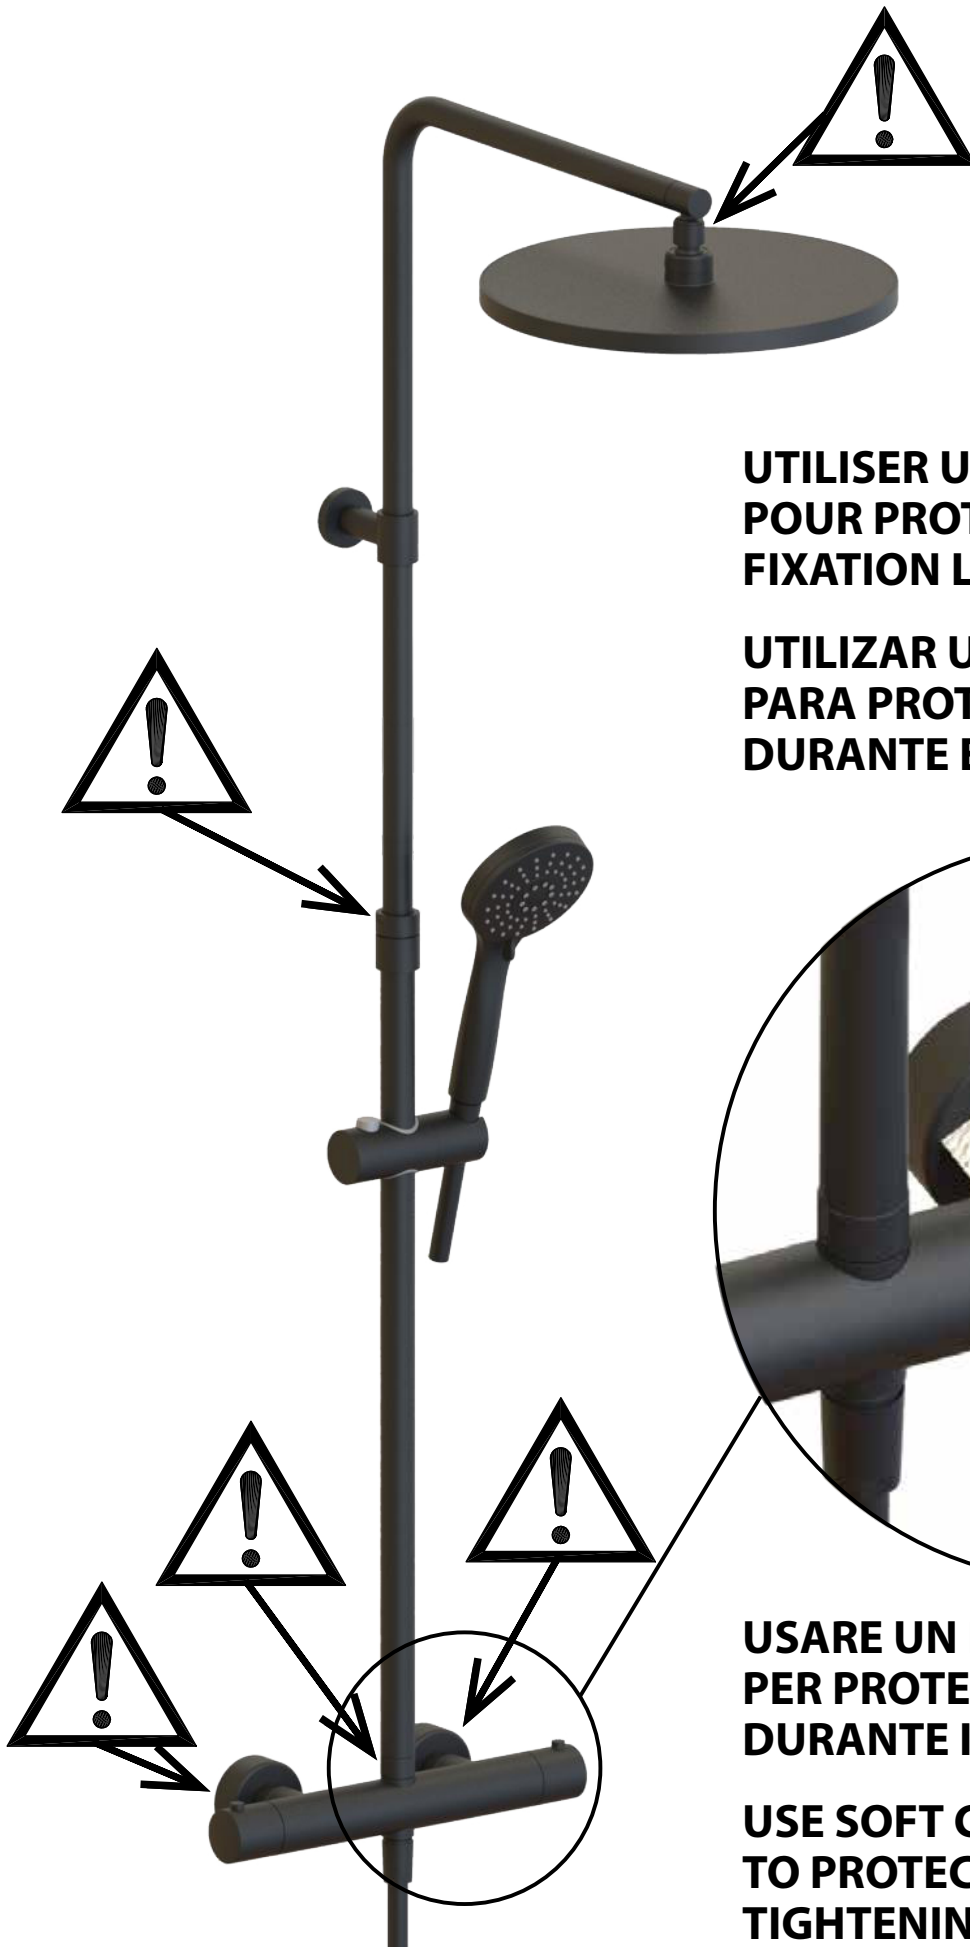

**UTILISER UN CHIFFON OU DU TISSU  
POUR PROTÉGER LES ÉCROUS DE  
FIXATION LORS DU SERRAGE**

**UTILIZAR UN PAÑO O TRAPO SUAVE  
PARA PROTEGER LAS TUERCAS  
DURANTE EL MONTAJE**

**USARE UN PANNO O DEL TESSUTO  
PER PROTEGGERE LE CALOTTE  
DURANTE IL SERRAGGIO**

**USE SOFT CLOTH OR TISSUE  
TO PROTECT UNION NUTS WHEN  
TIGHTENING**

**VERWENDEN SIE EIN TUCH,  
UM DIE MUTTER BEIM ANZIEHEN  
ZU SCHUTZEN**