


SLIM - coule

**2 control landscape thermostatic shower valve
(2 outlet)**

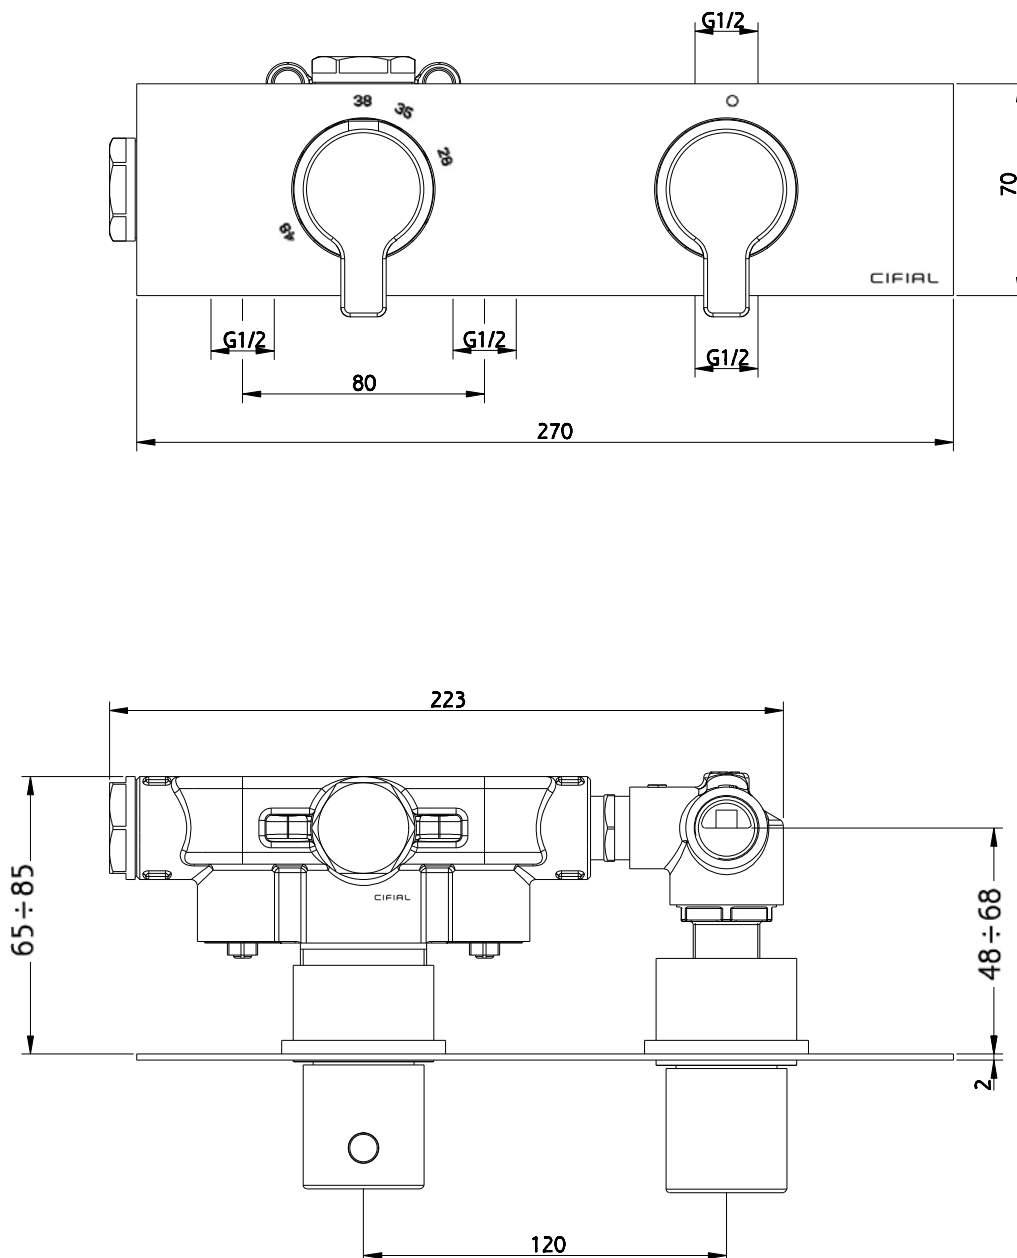


CIFIAL®

www.cifial.co.uk
sales@cifial.co.uk

dimensions mm

ZBL1914004


Concealed Thermostatic Valve Rough

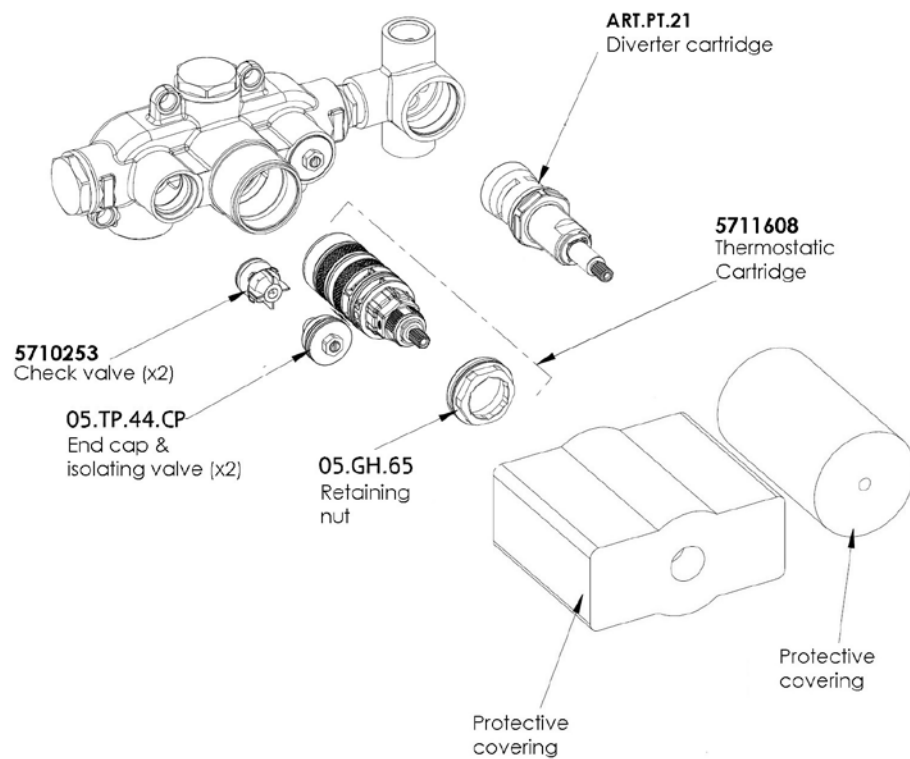

NOTES:

- 1) The red dot on the temperature limit ring must be aligned with the number 38 on the backplate
- 2) valve rough ZBL1914004 pre-assembled at the factory

Installer: Please leave all leaflets with the building owner to file for future reference

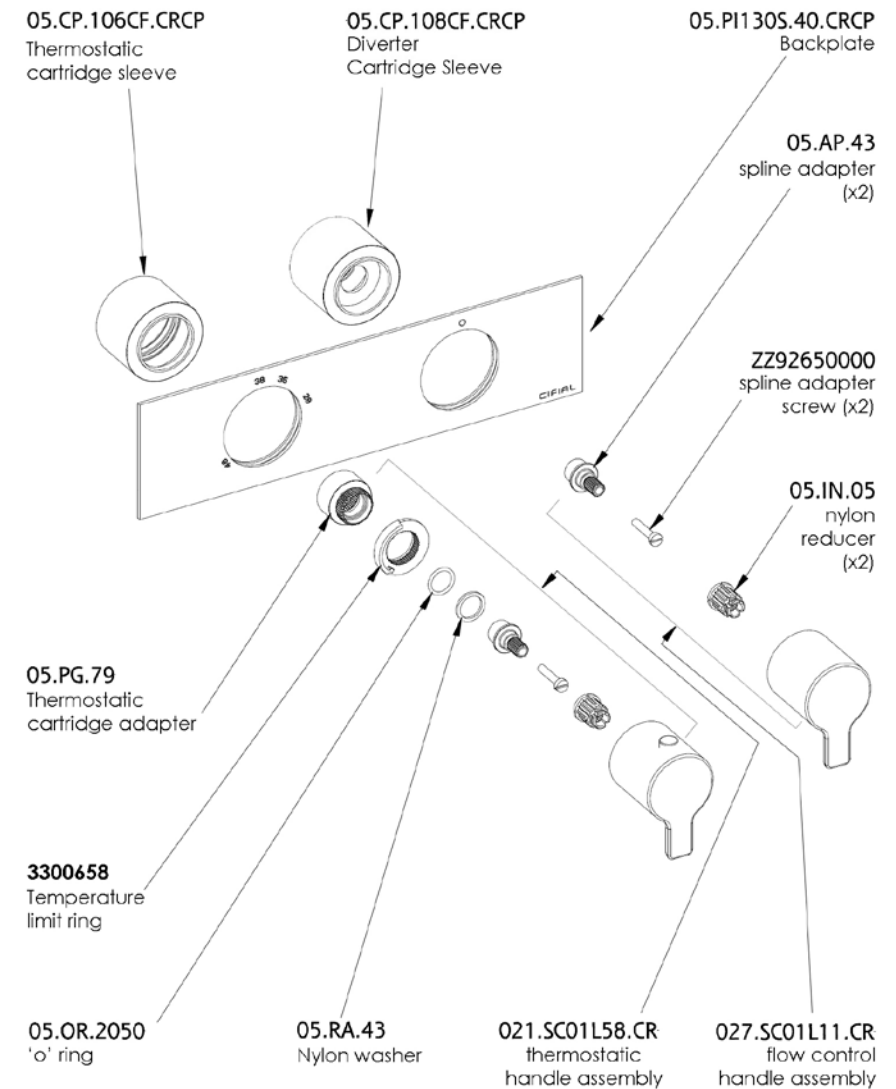

Operation

Slim landscape thermostatic shower valve - 2 outlets
Requires high pressure (minimum 1.5 bar)

Right Control = on/off and diverter combined

Lever downwards = off

Lever clockwise = mixed water out of top outlet (low flow) D


Lever anti clockwise = mixed water out of bottom outlet (high flow) V

NB: You cannot use both outlets at same time

Left Control = thermostat with temperature override

Flow rates

BAR	FLOW RATES	
	top outlet D	bottom outlet V
1.5	14	14.8
2	16.5	17
3	20	21.5

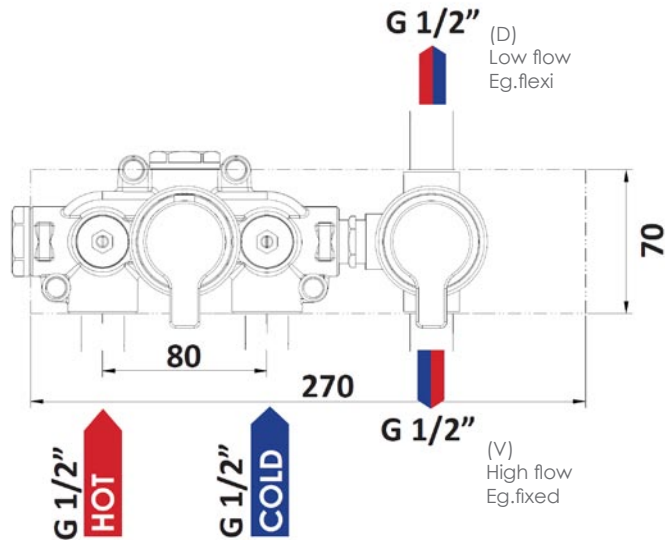

Prior to use - Setting the temperature

1. With both flow controls in the off position, remove the thermostatic valve handle and the temperature limit ring.
2. Put back on the thermostatic valve handle and turn clockwise until the cartridge "clicks". This is now set at fully cold.
3. Turn on one of the flow controls and turn the thermostatic valve handle anti-clockwise until the desired temperature is reached, ie 38°C. Use a thermometer to check if the temperature is correct (Fig. A)
4. Turn off the flow control, remove the thermostatic valve handle and replace the temperature limit ring with the red dot in the 12 o'clock position, ie corresponding with the 38°C on the etched plate (Fig. B).
5. Replace the thermostatic valve handle with the temperature override button position just prior to the 38°C (Fig. C)
6. Your thermostatic valve is now ready for use.

IMPORTANT: it is recommended that on a regular basis you rotate the thermostatic control handle between the maximum and minimum temperature limits by pressing the override button and with the water running. This way you prevent limestone incrustation that could build up and block the thermostatic cartridge.

Fig. A




Fig. B

Red mark aligned with the mark 38°C.





Fig. C

Temperature override button



CIFIAL®

www.cifial.co.uk
sales@cifial.co.uk