

# TECHNOVATION 465

---

## Deck Valves & Aqua Filler




*Pack consists of:*

*1 x 34891TH Pair Deck Bath Valves*

*1 x 033 Low Pressure Aqua Filler  
with clic-clac waste*

## Techno 465


### Par de manípulos 3/4" Pair deck bath valves

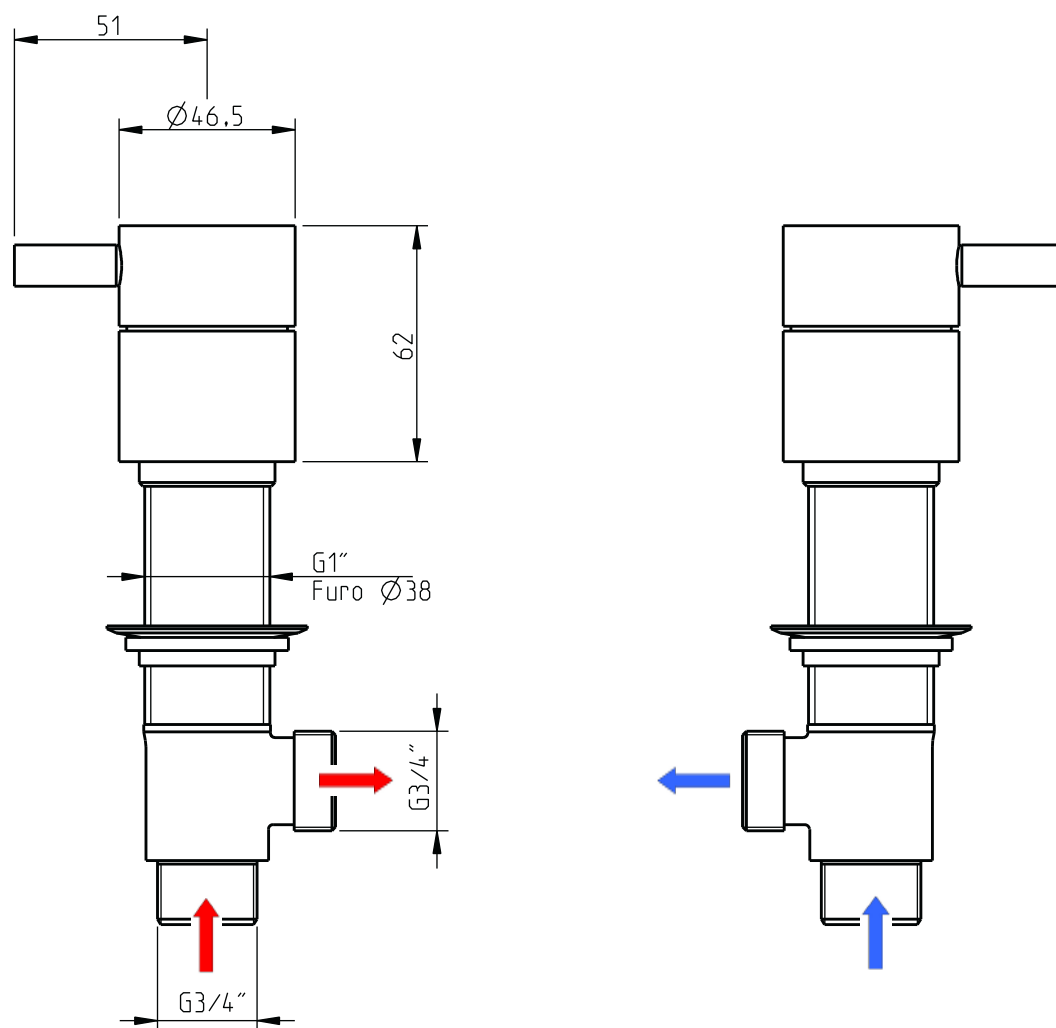

dimensões / dimensions mm

CIFIAL

**nota/note:** xxx representa diferentes acabamentos  
xxx represent different finishes

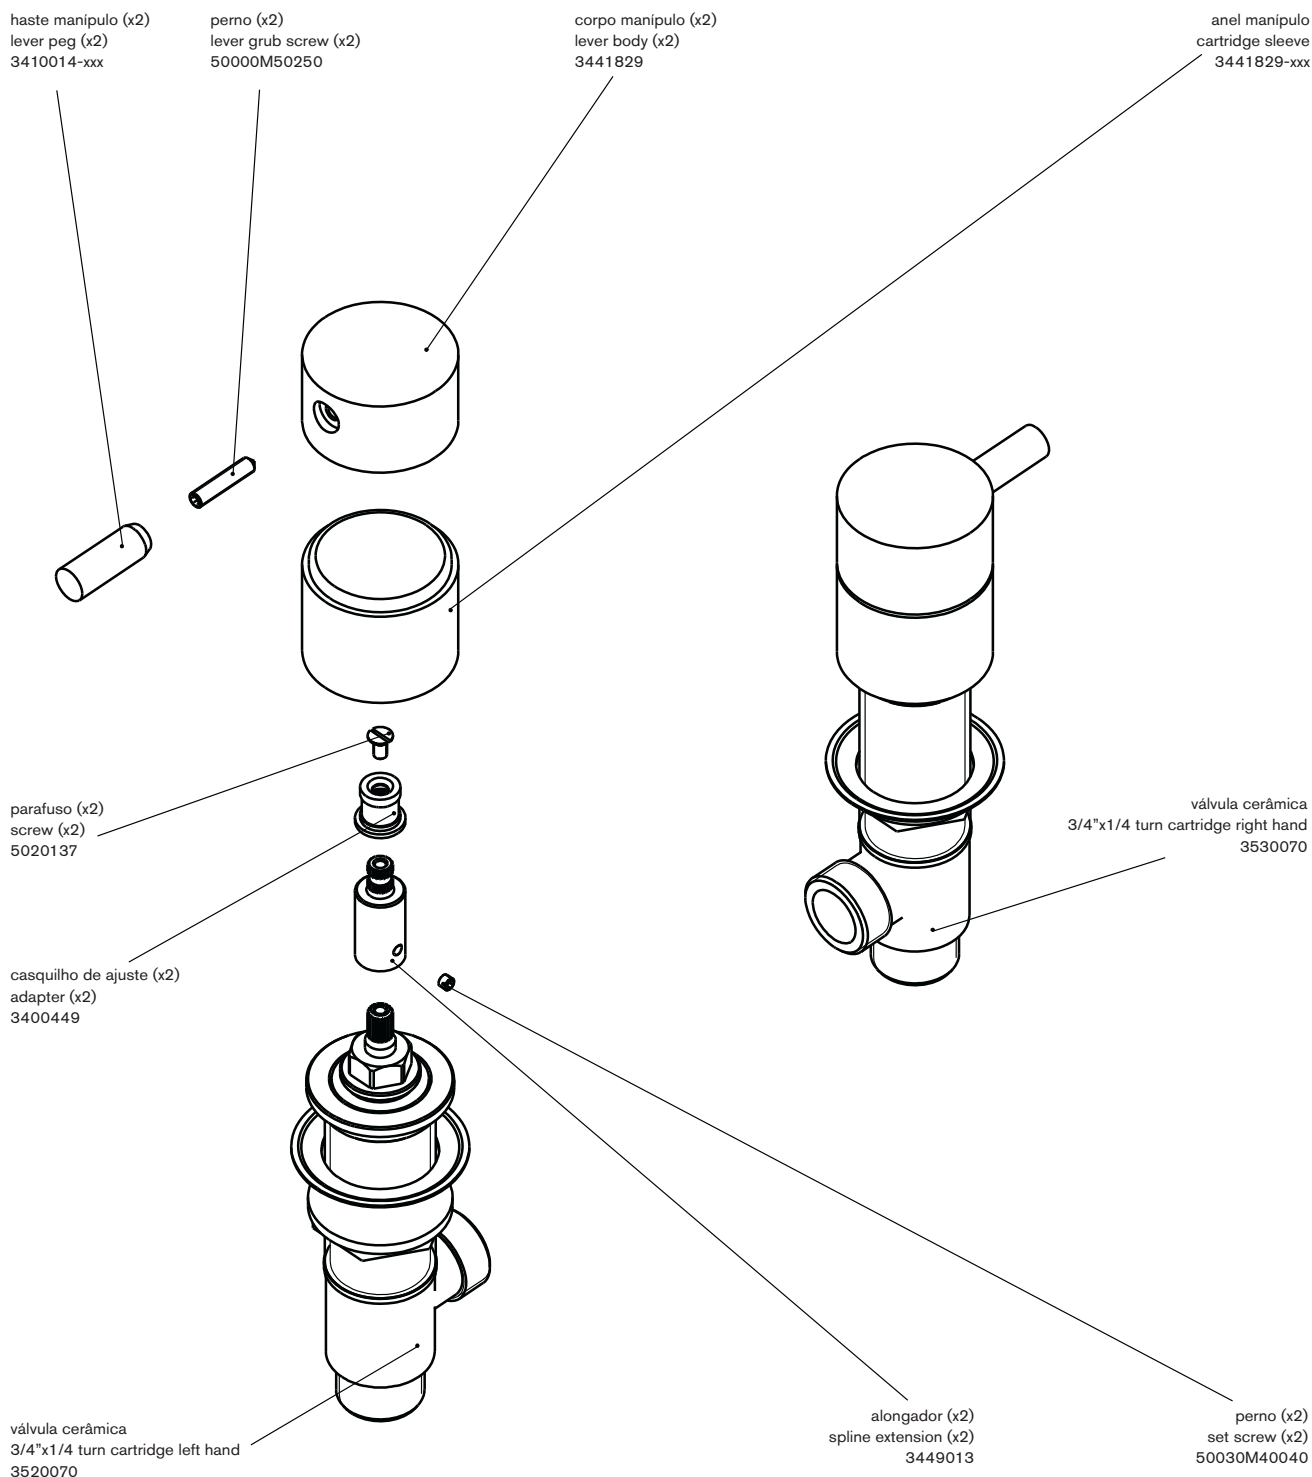


# AQUA FILLER

with clic-clac waste




|    |                           |
|----|---------------------------|
| 1  | Plug assembly (Removable) |
| 2  | Waste ferrule             |
| 3  | Waste flange              |
| 4  | Waste Flange seal         |
| 5  | Rubber waste seal         |
| 6  | Rubber seal               |
| 7  | 1.5" BSP nut              |
| 8  | 95° trap outlet elbow     |
| 9  | Tapered rubber seal       |
| 10 | Plastic seal              |
| 11 | 1.75" BSP compression nut |
| 12 | Trap cleaning eye         |
| 13 | Trap waste body           |

|    |                                           |
|----|-------------------------------------------|
| 14 | Rubber Seal                               |
| 15 | 1.25" BSP compression nut                 |
| 16 | Flexible overflow pipe                    |
| 17 | Flexible inlet hose                       |
| 18 | Overflow body                             |
| 19 | Rubber Overflow Seal                      |
| 20 | Overflow clamp plate / Nozzle body        |
| 21 | Overflow clamp plate screws               |
| 22 | Key Bolts (x2)                            |
| 23 | Overflow cover                            |
| 24 | Allen Hex Key for tightening              |
| 25 | Plastic Key for tightening                |
| 26 | Long ferrule (for use with thicker baths) |

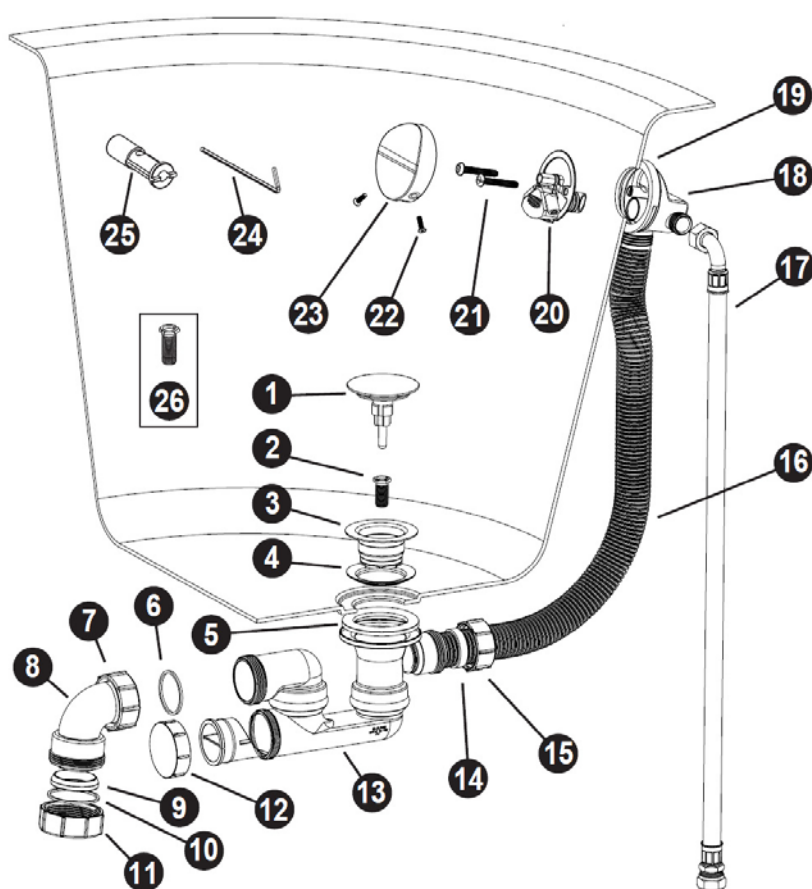


**CIFIAL**


with clic-clac waste

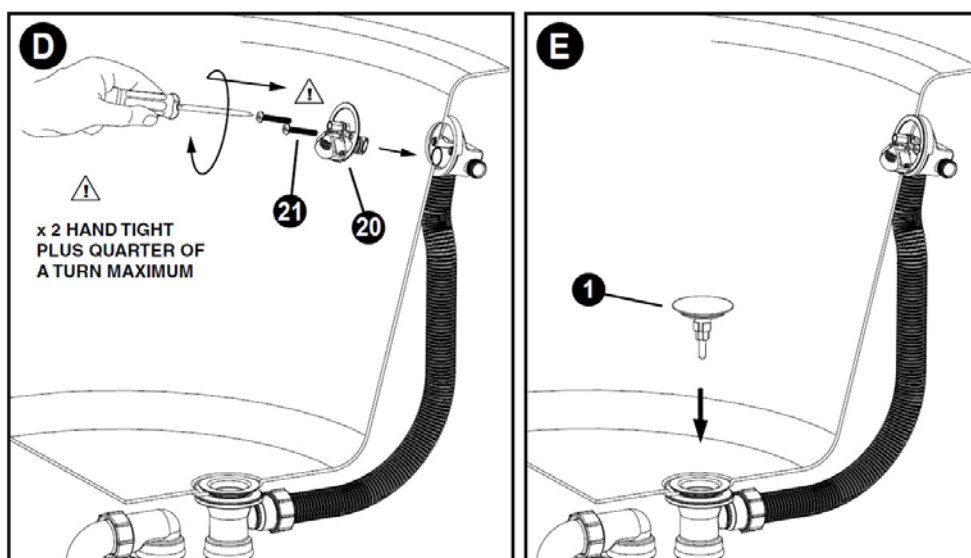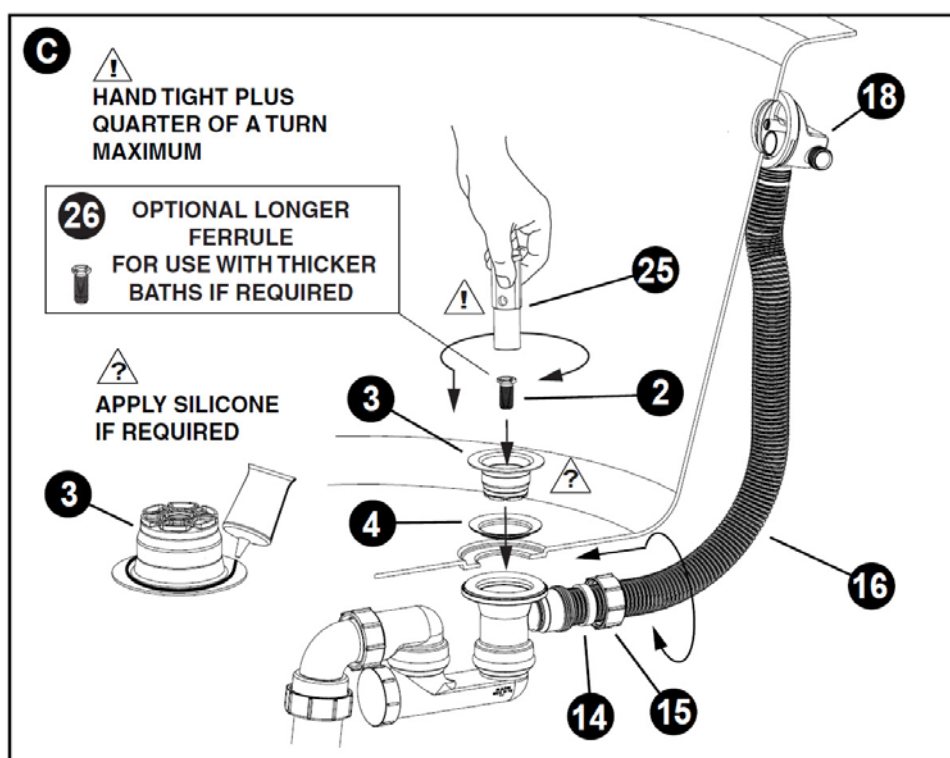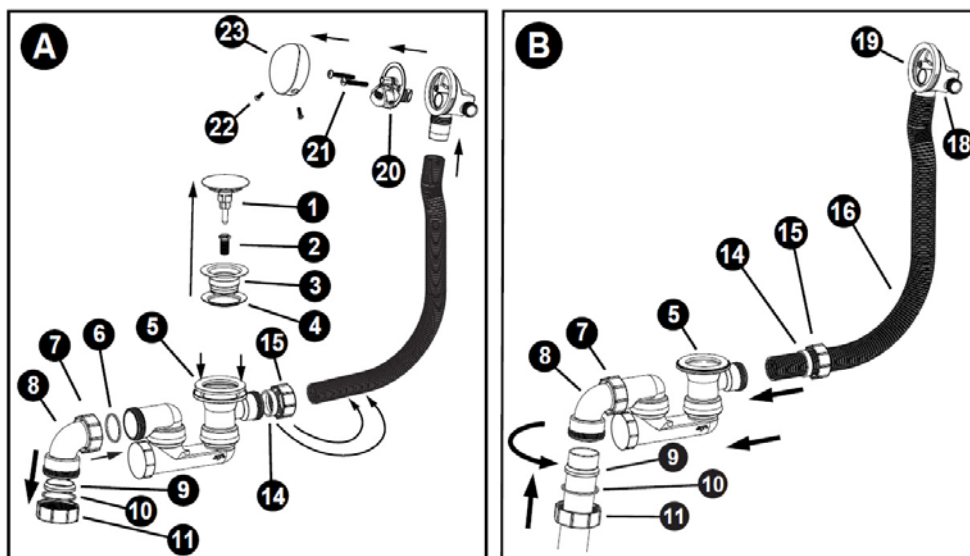

with clic-clac waste

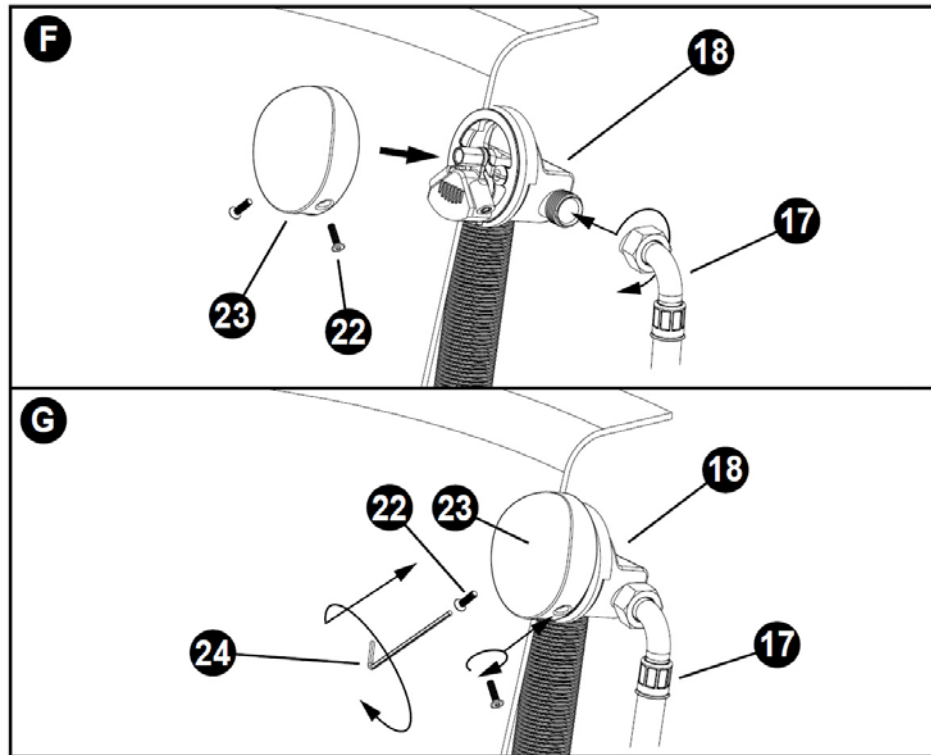

## FILL BATH & CHECK FULL ASSEMBLY FOR LEAKS

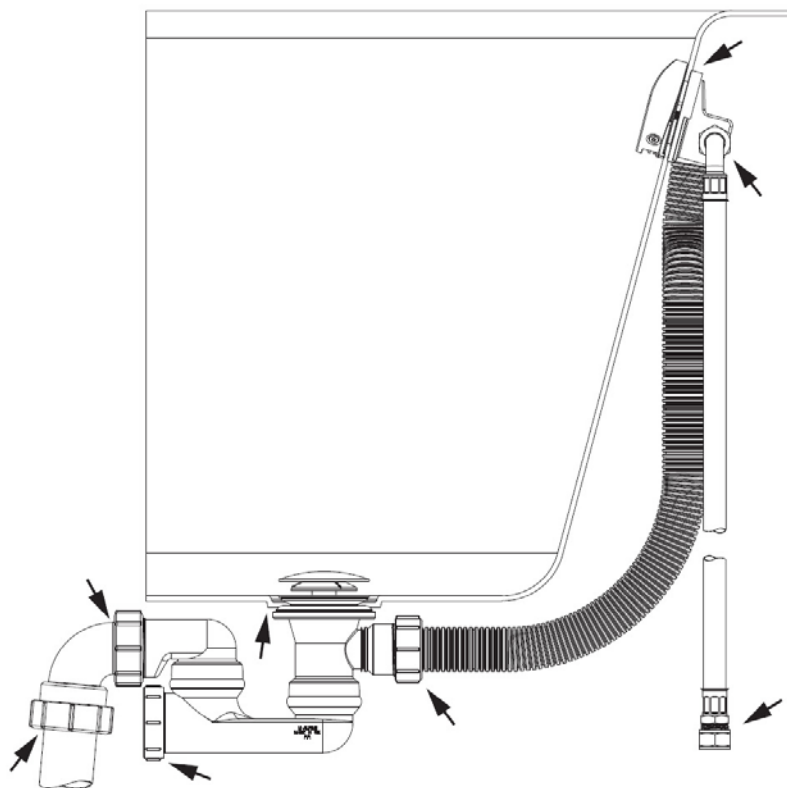

- Mixer valve (not supplied) must be installed according to manufacturers guidelines and Local authority regulations.
- Protection against pollution of potable water installations and general requirements of devices to prevent pollution by backflow as detailed in EN 1717 should be observed.
- Flexible inlet pipe should be installed in a self-draining position.