


M3


Hi-arch basin mixer with joystick

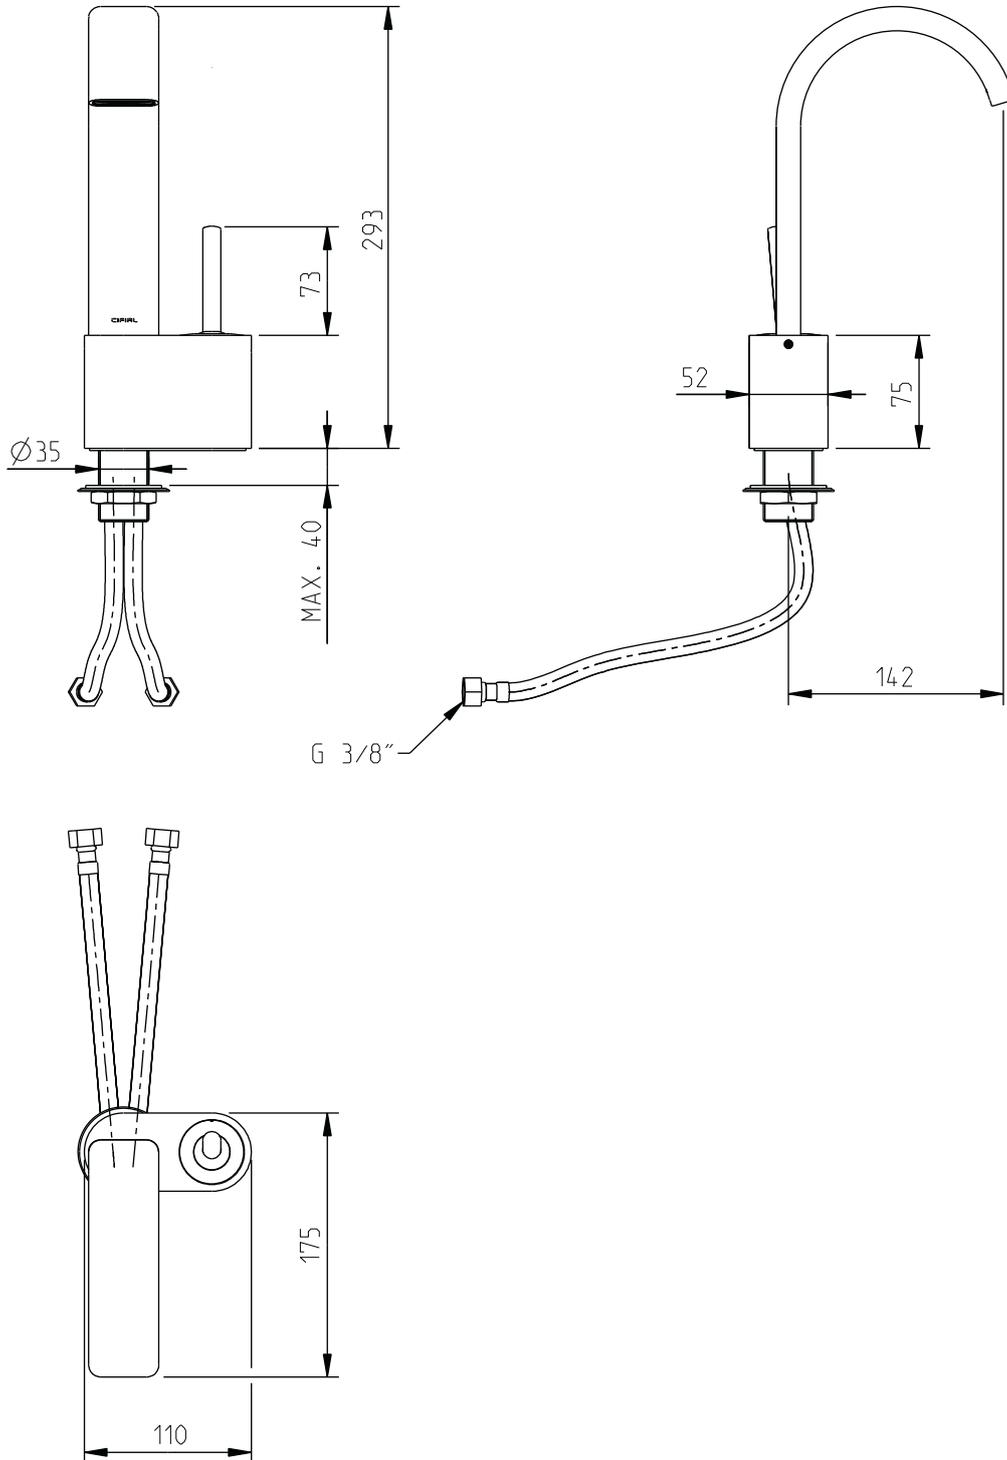

www.cifial.pt | cifial@cifial.pt
cifial@cifial.es
www.cifial.co.uk | sales@cifial.co.uk
www.cifialusa.com
www.cifial.pl | cifial@cifial.pl


dimensions mm

note: xxx represent different finishes

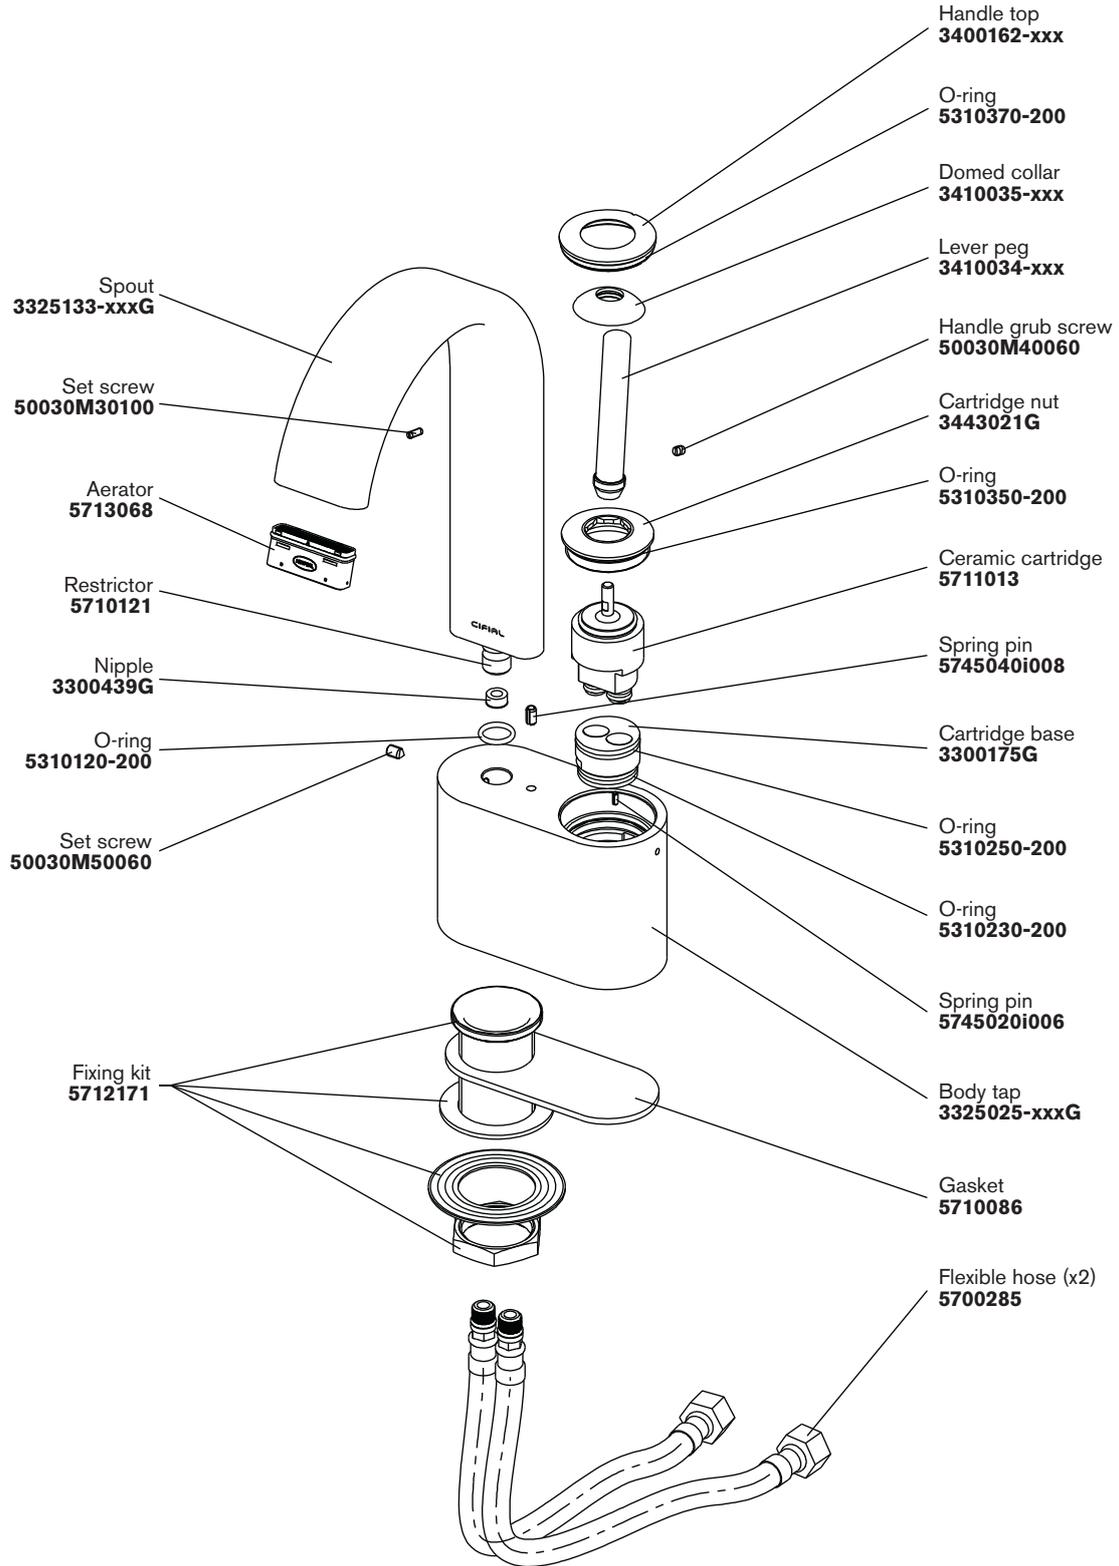

www.cifial.pt | cifial@cifial.pt
 cifial@cifial.es
 www.cifial.co.uk | sales@cifial.co.uk
 www.cifialusa.com
 www.cifial.pl | cifial@cifial.pl

Installer: Please leave all leaflets with the building owner to file for future reference



disassembling cartridge
 hexagonal accessory (supplied) - **3490012**
 wrench (not supplied)

EN

maintenance or replacement of restrictor

Remove the spout from the tap body, unscrewing its set screw. The check valve is installed and available in the spout base.


mounting options

To change position of the spout, start disassembling as above mentioned. Turn the tap body 180°, disassemble the cartridge as per technical drawing, turn it 180°, turn 180° the cover and reassemble all components again.

spout on the left side option (pre-assembled at factory)



spout on the right side option

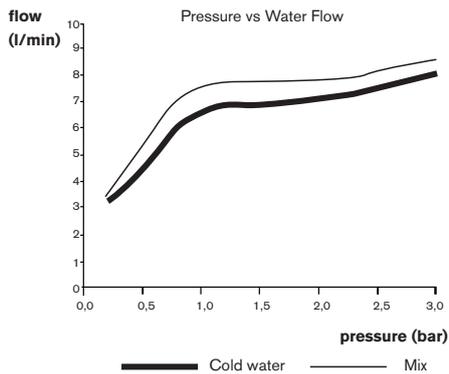

www.cifial.pt | cifial@cifial.pt
cifial@cifial.es
www.cifial.co.uk | sales@cifial.co.uk
www.cifialusa.com
www.cifial.pl | cifial@cifial.pl

Installer: Please leave all leaflets with the building owner to file for future reference